

LOC/DME I-TNF

109.95

Chan 36(Y)

APP CRS

220°

Rwy Idg

4999

TDZE

892

Apt Elev

900

ILS or LOC RWY 22

ZANESVILLE MUNI (ZZV)


DME required.

▼

▲ NA

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 360° and I-TNF localizer northeast course 040° to CEVAY/I-TNF 12.3 DME and hold.

ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0*
----------------	---------------------------------------	---------------------------

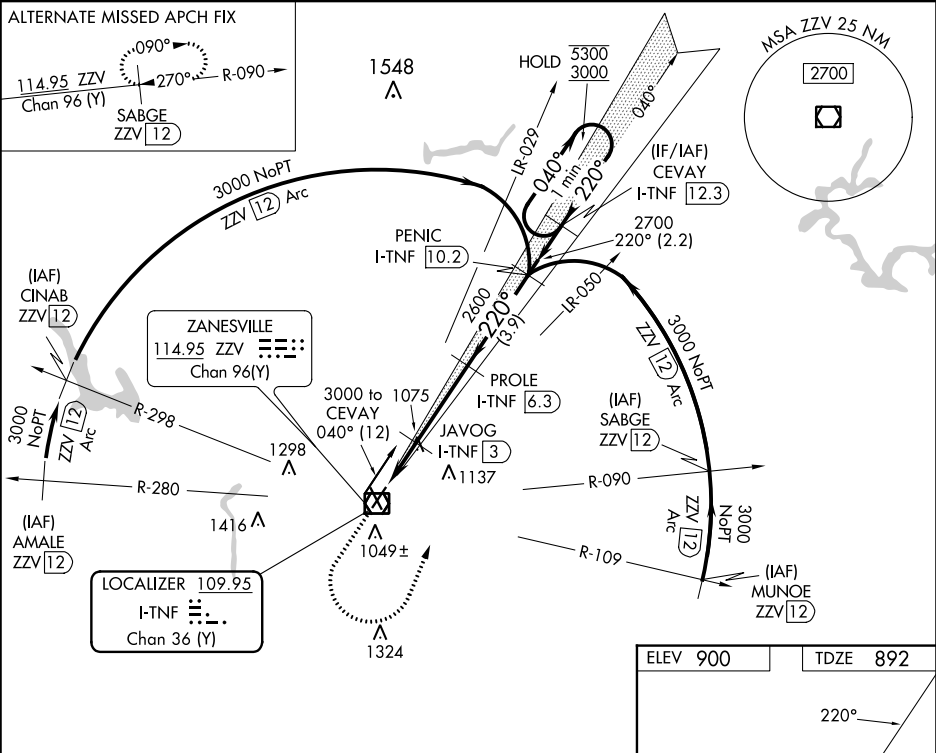

23166

WAAS CH 78039 W22A	APP CRS 220°	Rwy Idg 4999 TDZE 892 Apt Elev 900
--	------------------------	---

RNAV (GPS) RWY 22
ZANESVILLE MUNI (ZZV)


RNP APCH.





For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.

MISSED APPROACH:
Climb to 2800 direct
RUTEE and hold.

ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0*
-----------------------	--	----------------------------------

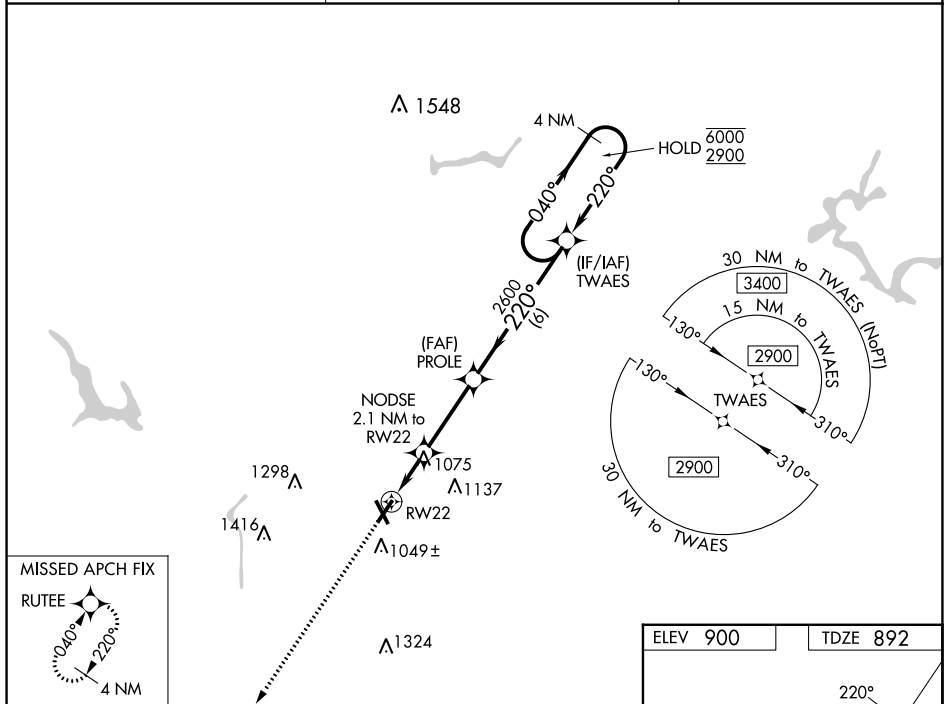

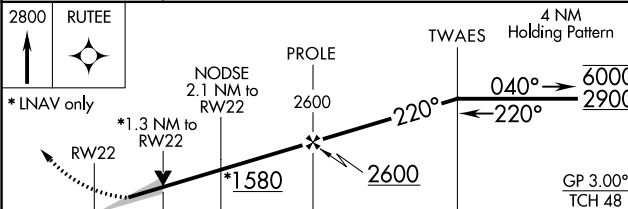2800 ↑ RUTEE					
* LNAV only					
CATEGORY	A	B	C	D	
LPV DA	1092- ³ / ₄		200 (200- ³ / ₄)		
LNAV/ VNAV DA	1297-1 ¹ / ₈		405 (400-1 ¹ / ₈)		
LNAV MDA	1340-1	448 (500-1)	1340-1 ³ / ₈	448 (500-1 ³ / ₈)	
C CIRCLING	1380-1 480 (500-1)	1420-1 520 (600-1)	1560-1 ³ / ₄ 660 (700-1 ³ / ₄)	1620-2 ¹ / ₄ 720 (800-2 ¹ / ₄)	

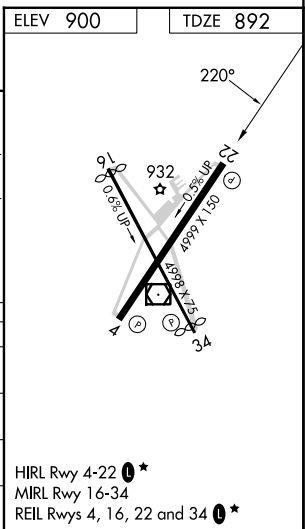

ZANESVILLE, OHIO
Orig-A 05DEC19

39°57'N-81°54'W

ZANESVILLE MUNI (ZZV)
RNAV (GPS) RWY 22

EC-2, 22 FEB 2024 to 21 MAR 2024


WAAS CH 72639 W04A	APP CRS 040°	Rwy Idg 4999 TDZE 900 Apt Elev 900
--	------------------------	---

RNAV (GPS) RWY 4
ZANESVILLE MUNI (ZZV)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Newark altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Newark altimeter setting and increase all LPV and LNAV/VNAV DA to 1214 and all visibilities to 1 SM, increase all MDA 80 feet; increase LNAV Cat C/D visibility ½ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2900 direct
TWAES and hold.

ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0*
-----------------------	--	----------------------------------

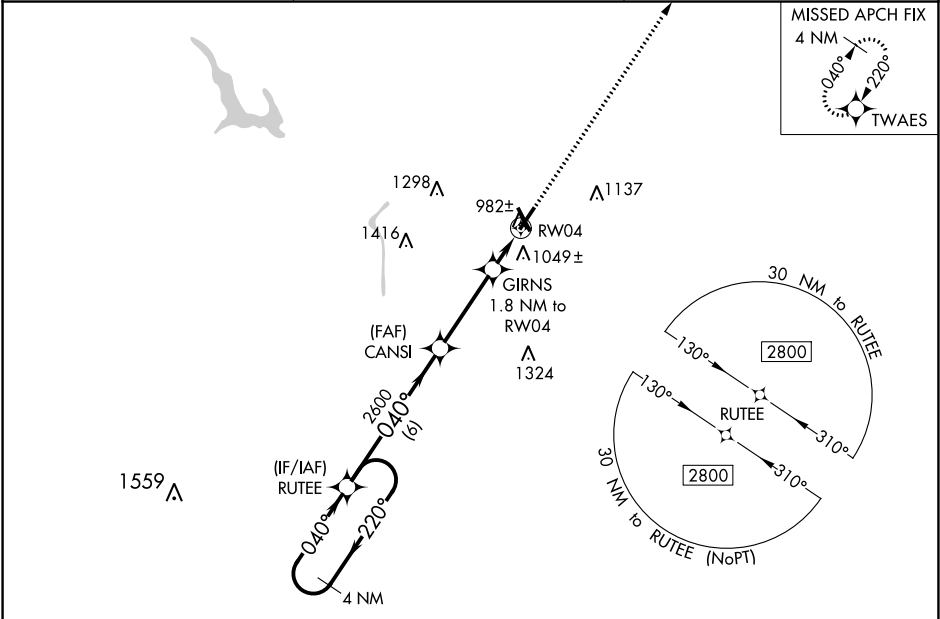

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

2900 TWAES

*RNAV only

GP 3.00° TCH 45

6 NM 3.4 NM 0.8 NM 1 NM

CATEGORY	A	B	C	D
LPV DA	1150-7/8 250 (300-7/8)			
LNAV/VNAV DA	1150-7/8 250 (300-7/8)			
LNAV MDA	1240-1 340 (400-1)			
CIRCLING	1380-1 480 (500-1)	1400-1 500 (500-1)	1620-2 720 (800-2)	1620-2¼ 720 (800-2¼)

ELEV 900 TDZE 900

HIRL Rwy 4-22 0*
MIRL Rwy 16-34
REIL Rwy 4, 16, 22 and 34 0*

EC-2, 22 FEB 2024 to 21 MAR 2024



EC-2, 22 FEB 2024 to 21 MAR 2024


VOR/DME ZZV	APP CRS	Rwy Idg	4999
114.95	217°	TDZE	892
Chan 96 (Y)		Apt Elev	900

VOR RWY 22
ZANESVILLE MUNI (ZZV)

▼ VDP NA when using Newark altimeter setting. When local altimeter setting not received, use Newark altimeter setting and increase all MDA 80 feet; increase S-22 Cat A visibility ¼ SM and Circling Cat C/D visibility ¼ SM. ▲	MISSED APPROACH: Climb to 3000 then right turn direct ZZV VOR/DME and hold.
---	--

ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0★
----------------	---------------------------------------	---------------------------

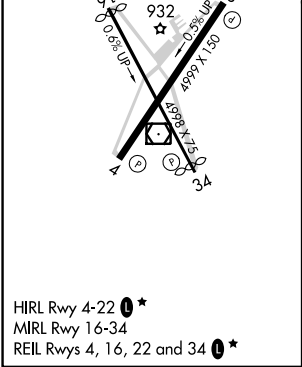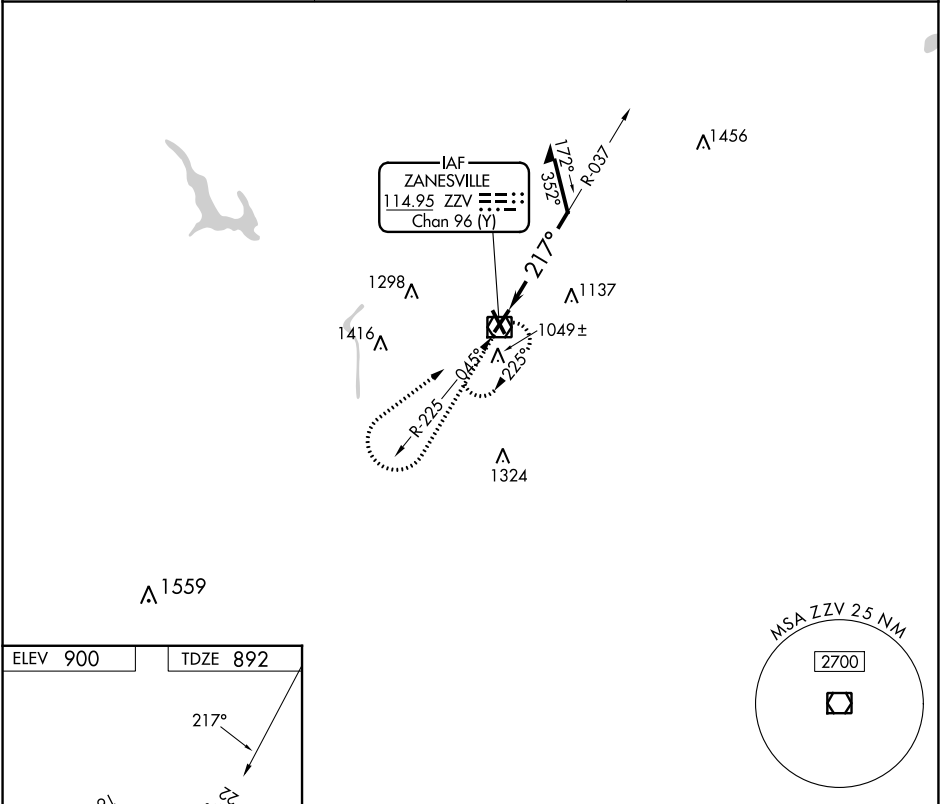

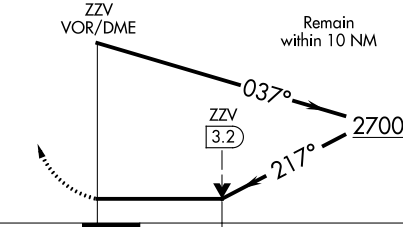3000							
CATEGORY	A		B		C		D
S-22	1720-1 828 (900-1)		1720-1¼ 828 (900-1¼)		1720-2½ 828 (900-2½)		
 CIRCLING	1720-1¼ 820 (900-1¼)		820 (900-1¼)		1720-2½ 820 (900-2½)		1720-2¾ 820 (900-2¾)


VOR/DME ZZV 114.95 Chan 96 (Y)	APP CRS 045°	Rwy Idg 4999 TDZE 900 Apt Elev 900
--	------------------------	---

VOR RWY 4
ZANESVILLE MUNI (ZZV)

V VDP NA when using Newark altimeter setting.
A When local altimeter setting not received, Newark altimeter setting and increase all MDA 80 feet; increase S-4 and Circling Cat B visibility $\frac{1}{4}$ SM and Cat C/D $\frac{1}{2}$ SM, NEBLA fix minimums increase S-4 Cat C/D visibility $\frac{1}{4}$ SM and Circling Cat C/D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3000 then left turn
direct ZZV VOR/DME and hold.


ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0*
-----------------------	--	----------------------------------

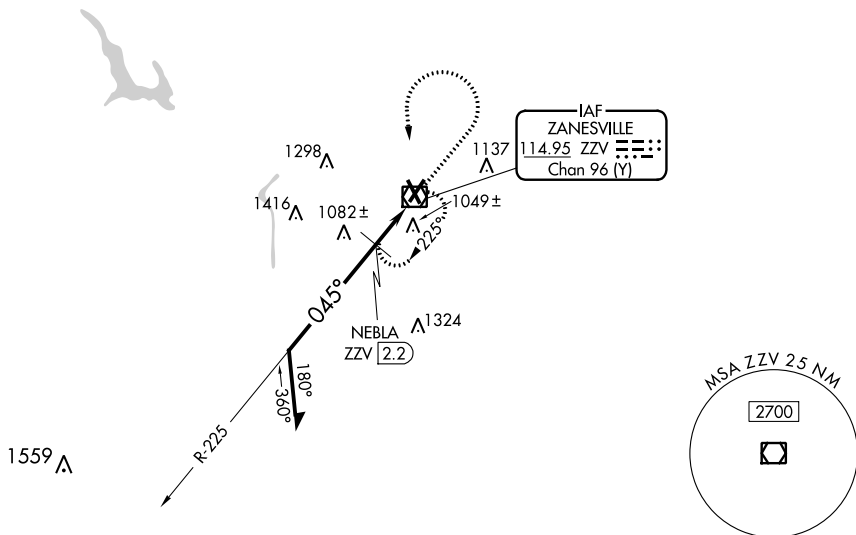

ELEV 900		TDZE 900
----------	--	----------

*1680 when using Newark altimeter setting.

Remain
within 10 NM

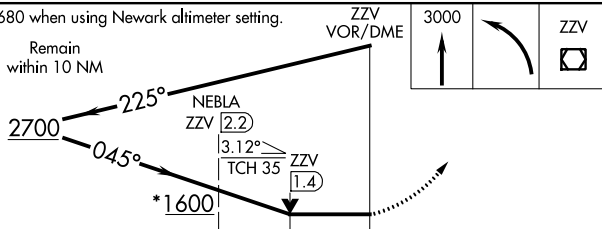

		- 0.8 NM - 1.2 NM		0.2	
CATEGORY	A	B		C	D
S-4	1600-1	700 (700-1)		1600-2	700 (700-2)
 CIRCLING	1600-1	700 (700-1)		1620-2 720 (800-2)	1620-2¼ 720 (800-2¼)
NEBLA FIX MINIMUMS					
S-4	1340-1	440 (500-1)		1340-1¼	440 (500-1¼)
 CIRCLING	1380-1 480 (500-1)	1400-1 500 (500-1)		1620-2 720 (800-2)	1620-2¼ 720 (800-2¼)

