

|               |             |                     |
|---------------|-------------|---------------------|
| LOC/DME I-CNL | APP CRS     | Rwy Idg             |
| <b>111.3</b>  | <b>047°</b> | <b>7200</b>         |
| Chan 50       |             | TDZE <b>260</b>     |
|               |             | Apt Elev <b>266</b> |

ILS or LOC RWY 4R


BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

▼ Rwy 4R helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. For inop ALS, increase S-ILS 4R all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1 1/4 SM. OGRAY Fix Minimums: For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D to 1 1/2 SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 110° and LIT VORTAC R-089 to ATERS INT/UIT 16 DME and hold.

|               |                     |                    |                    |               |
|---------------|---------------------|--------------------|--------------------|---------------|
| D-ATIS        | LITTLE ROCK APP CON | ADAMS TOWER        | GND CON            | CLNC DEL      |
| <b>125.65</b> | <b>135.4 353.6</b>  | <b>118.7 257.8</b> | <b>121.9 339.8</b> | <b>118.95</b> |

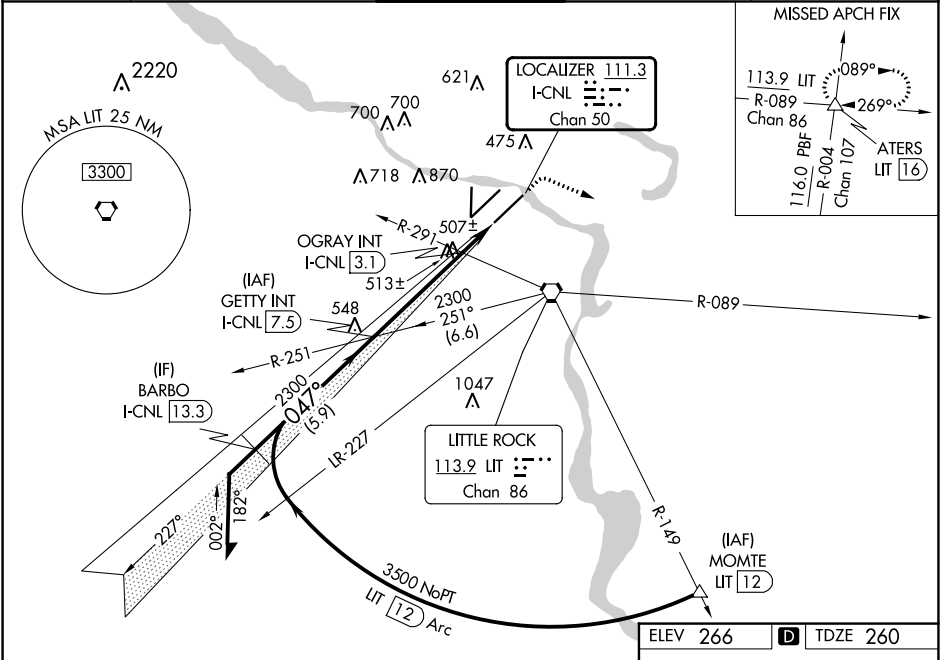

Remain within 10 NM

GETTY INT I-CNL (7.5)

2300

GS 3.00° TCH 49

Use I-CNL DME when on the localizer course.

800

4000

LIT R-089

ATERS

OGRAY INT I-CNL (3.1)

I-CNL (1.3)

880

4.4 NM

1.8 NM

| CATEGORY                                   | A                    | B                     | C                              | D                      |
|--------------------------------------------|----------------------|-----------------------|--------------------------------|------------------------|
| S-ILS 4R                                   |                      | 523/40                | 263 (300-3/4)                  |                        |
| S-LOC 4R                                   | 880/40               | 620 (700-3/4)         | 880-1 3/8                      | 620 (700-1 1/2)        |
| CIRCLING                                   | 880-1<br>614 (700-1) | 1000-1<br>734 (800-1) | 1180-2 3/4<br>914 (1000-2 3/4) | 1180-3<br>914 (1000-3) |
| OGRAY (DUAL VOR RECEIVERS OR DME REQUIRED) |                      |                       |                                |                        |
| S-LOC 4R                                   | 780/40               | 520 (600-3/4)         | 780/55                         | 520 (600-1)            |
| CIRCLING                                   | 820-1<br>554 (600-1) | 1000-1<br>734 (800-1) | 1180-2 3/4<br>914 (1000-2 3/4) | 1180-3<br>914 (1000-3) |

