

LOC I-LSN	APP CRS	Rwy Idg	6118
108.7	077°	TDZE	399
		Apt Elev	403


ILS or LOC RWY 8
LANCASTER (LNS)

⚠ Night landing: Rwy 13, 31 NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase S-ILS DA to 664 feet; increase all MDAs 80 feet and visibility S-LOC 8 Cats C/D and Circling Cats B/D visibility ¼ SM, increase Circling Cat C visibility ½ SM, increase XULAW fix minimums S-LOC 8 and Circling Cats C/D visibility ¼ SM. For inop MALSR, increase S-LOC 8 Cats C and D visibility ¾ mile. For inop MALSR when using Harrisburg Intl altimeter setting increase S-ILS 8 visibility all Cats ½ mile, S-LOC 8 Cats B visibility ¾ mile, Cat C, D 1 mile, increase Circling Cat B, D visibility ¼ mile. XULAW Fix minimums increase S-LOC 8 Cats C and D visibility to 1 ½ mile and Circling Cat C visibility to 1 ¾ mile.

MALSR
AS

MISSED APPROACH:
Climb to 1200 then climbing left turn to 3000 on LRP VOR/ DME R-333 to KUPPS INT/LRP 12.5 DME and hold.

ATIS 125.675	HARRISBURG APP CON 126.45 281.525	LANCASTER TOWER★ 120.9 (CTAF) 0 251.1	GND CON 121.8	UNICOM 122.95
-----------------	--------------------------------------	--	------------------	------------------

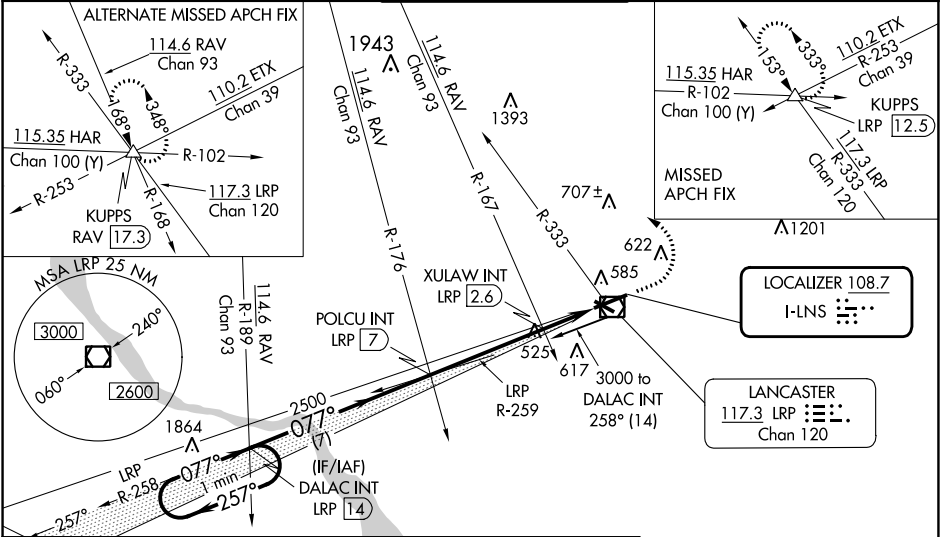

*1160 when using Harrisburg Intl altimeter setting.				ELEV 403	TDZE 399
One Minute Holding Pattern				*LOC only.	
DALAC INT LRP 14				XULAW INT LRP 2.6	
POLCU INT LRP 7				LRP 0.5	
3000 ← 257°				LRP VOR/DME	
GS 3.00° TCH 40				7 NM	
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).				4.4 NM	
2500				2.1 NM	
CATEGORY				REIL Rwy 31	
S-ILS 8				HIRL Rwy 8-26	
S-LOC 8				MIRL Rwy 13-31	
CIRCLING				FAF to MAP 6.5 NM	
XULAW FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				Knots	
S-LOC 8				Min:Sec	
CIRCLING				6:30 4:20 3:15 2:36 2:10	