

WAAS CH 65809 W01A	APP CRS 009°	Rwy Idg TDZE 588 Apt Elev 588
--	------------------------	---

RNAV (GPS) RWY 1

LEBANON MUNI (M54)


▼

▲NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nashville Intl altimeter setting: increase LPV DA to 1131 and all Cats visibility ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. LNAV/VNAV NA when using Nashville Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct LATGE and hold.

AWOS-3 118.325	NASHVILLE APP CON 118.4 360.7	UNICOM 122.725 (CTAF)
--------------------------	---	---------------------------------

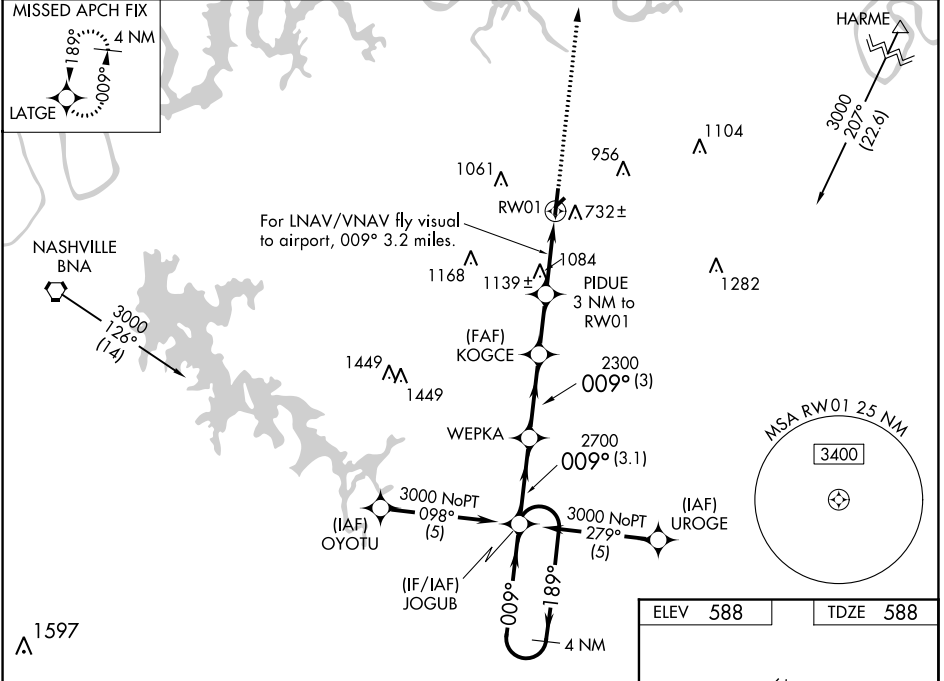

ELEV 588 TDZE 588

61

1801 X 150

5000 X 100

0.83° Up

009°

MIRL Rwy 1-19

REIL Rwy 1 and 19

4 NM Holding Pattern JOGUB		For LNAV/VNAV fly visual to airport, 009° 3.2 miles.		3000	LATGE
3000 ← 189°		009° →		009°	
GP 3.00° TCH 45		WEPKA		2700	*LNAV only.
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 21).		KOGCE		2300	
		PIDUE 3 NM to RW01		*1580	
		RW01			
				3.1 NM	3 NM
CATEGORY	A	B	C	D	
LPV DA	1088-1¾ 500 (500-1¾)				
LNAV/VNAV DA	1663-2	1075 (1100-2)	1663-3	1075 (1100-3)	
LNAV MDA	1400-1 812 (900-1)	1400-1¼ 812 (900-1¼)	1400-2½ 812 (900-2½)	1400-2¾ 812 (900-2¾)	
CIRCLING	1400-1¼	812 (900-1¼)	1440-2½ 852 (900-2½)	1520-3 932 (1000-3)	

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024