RNAV (GPS) RWY 1

LEBANON MUNI (M54)

WAAS	APP CRS	Rwy Idg	4527
CH 65809	009°	TDZE	588
W01A		Apt Elev	588

T NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nashville Intl altimeter setting: increase LPV DA to 1131 and all Cats visibility ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. LNAV/VNAV NA when using Nashville Intl altimeter setting.

MISSED APPROACH: Climb to 3000 direct LATGE and hold.

AWOS-3	NASHVILLE APP CON	UNICOM
118.325	118.4 360.7	122.725 (CTAF)

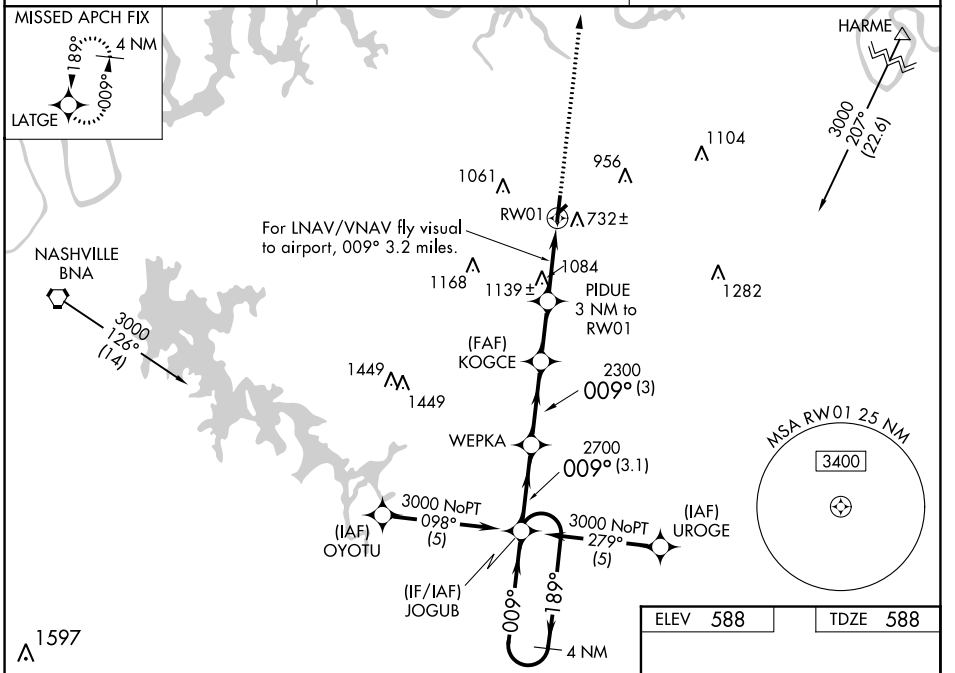

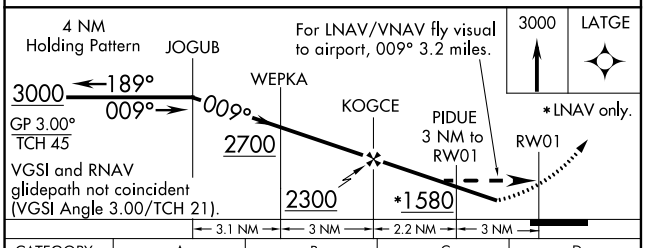

CATEGORY	A	B	C	D
LPV DA	1088-1¾ 500 (500-1¾)			
LNAV/VNAV DA	1663-2 1075 (1100-2)		1663-3 1075 (1100-3)	
LNAV MDA	1400-1 812 (900-1)	1400-1¼ 812 (900-1¼)	1400-2½ 812 (900-2½)	1400-2¾ 812 (900-2¾)
CIRCLING	1400-1¼ 812 (900-1¼)		1440-2½ 852 (900-2½)	1520-3 932 (1000-3)

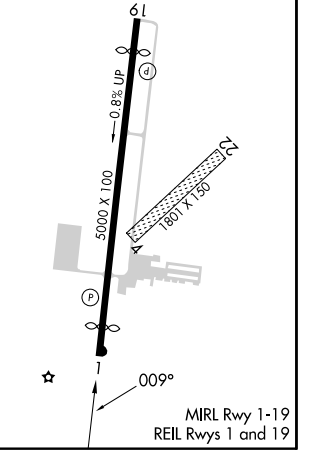

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 90309 W19A | APP CRS 189° | Rwy Idg 4500 TDZE 568 Apt Elev 588

RNAV (GPS) RWY 19

LEBANON MUNI (M54)

NA

Baro-VNAV NA when using Nashville Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nashville Intl altimeter setting: increase LPV DA to 942; increase all MDA 60 feet and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct JOGUB and hold.

AWOS-3	NASHVILLE APP CON	UNICOM
118.325	118.4 360.7	122.725 (CTAF)

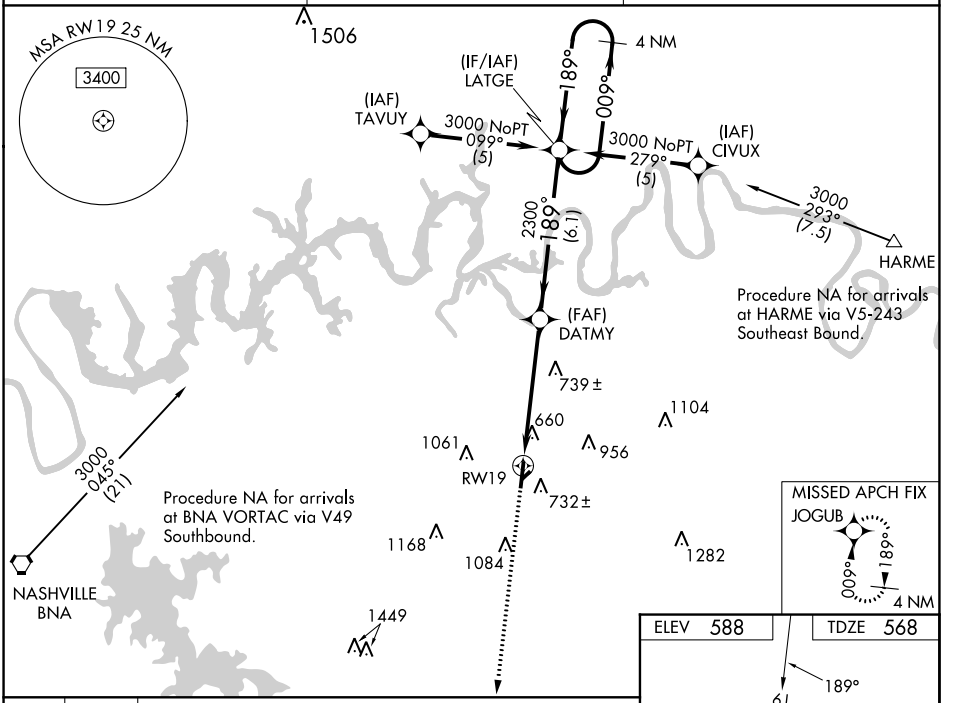

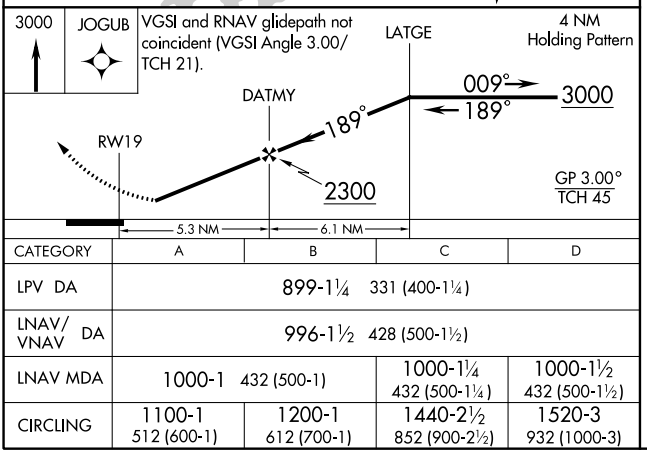

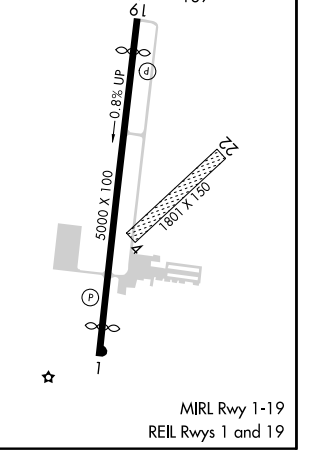

CATEGORY	A	B	C	D
LPV DA	899-1¼ 331 (400-1¼)			
LNAV/VNAV DA	996-1½ 428 (500-1½)			
LNAV MDA	1000-1 432 (500-1)		1000-1¼ 432 (500-1¼)	1000-1½ 432 (500-1½)
CIRCLING	1100-1 512 (600-1)	1200-1 612 (700-1)	1440-2½ 852 (900-2½)	1520-3 932 (1000-3)

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024