


LOC I-EXW	APP CRS	Rwy Idg	7815
108.3	259°	TDZE	548
		Apt Elev	565

ILS or LOC RWY 26
EASTERN WV RGNL/SHEPHERD FLD (MRB)

For inoperative MALSR, increase S-ILS 26 Cat E visibility to ¾ mile and S-LOC 26 Cat E visibility to 1¼ mile. When local altimeter setting not received, use Hagerstown altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase S-LOC 26 Cat C, D, E and Circling Cat C and D visibility ¼ mile. For inoperative MALSR when using Hagerstown altimeter setting increase S-ILS 26 visibility all Cats to 1 mile and S-LOC 26 Cat E visibility to 1½ mile.

MALSR
MISSED APPROACH: Climb to 1100 then climbing left turn to 3300 direct MRB VORTAC and hold, continue climb-in-hold to 3300.

ASOS	POTOMAC APP CON	MARTINSBURG TOWER ★	GND CON	CLNC DEL	CLNC DEL
119.925	126.825 239.025	124.3 (CTAF) 233.7	121.8 257.65	121.8 257.65	132.075 269.075 (When twr closed)

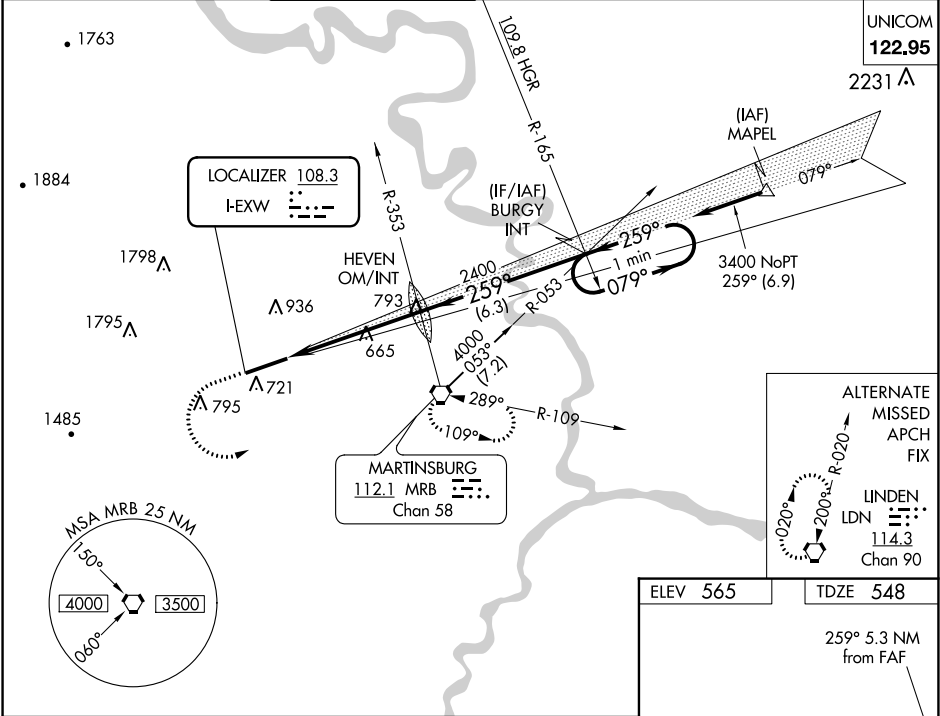

1100	3300	MRB					
CATEGORY	A	B	C	D	E		
S-ILS 26	748-½ 200 (200-½)						
S-LOC 26	920-½ 372 (400-½)			920-¾ 372 (400-¾)			
CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1260-2¼ 695 (700-2¼)	2140-3 1575 (1600-3)		

ELEV 565	TDZE 548
259° 5.3 NM from FAF	
TWR 8815 X 150	
622	
REIL Rwy 8-26	
HIRL Rwy 8-26	
FAF to MAP 5.3 NM	
Knots	60 90 120 150 180
Min:Sec	5:18 3:32 2:39 2:07 1:46