


WAAS CH 69322 W03A	APP CRS 031°	Rwy Idg TDZE 1248 Apt Elev 1270
--	------------------------	---

RNAV (GPS) RWY 3
FOOTHILLS RGNL (MRN)

Baro-VNAV NA when using Hickory altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). DME/DME RNP-0.3 NA. VDP NA with Hickory altimeter setting. When local altimeter not received use Hickory altimeter: increase LPV DA to 1540 feet, LNAV/VNAV DA to 1600 feet, and visibility LNAV/VNAV all Cats ¼ SM; increase all MDA 60 feet and visibility LNAV Cats C and D ¼ SM and Circling Cat D ¼ SM.

MISSED APPROACH:
Climb to 4800 direct
CIKIS and hold.

AWOS-3P 124.175	ATLANTA CENTER 125.15 263.0	UNICOM 122.7 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

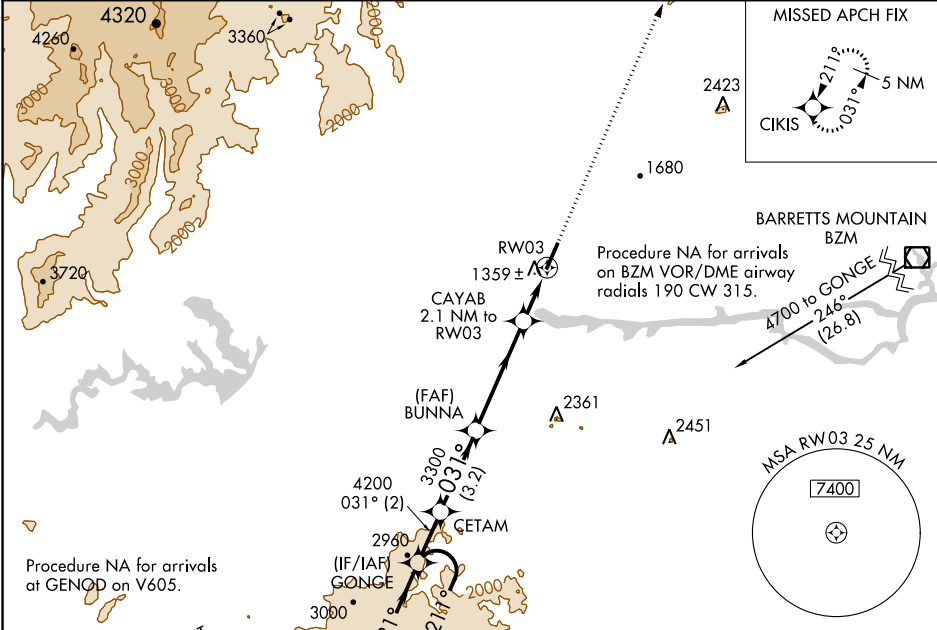

ELEV 1270		TDZE 1248	
MIRL Rwy 3-21		REIL Rwy 3 and 21	
5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).	
GONGE		CETAM	
4700		4200	
GP 3.00° TCH 45		3300	
211°		031°	
031°		031°	
2 NM		3.2 NM	
A		B	
LPV DA		1498-1 250 (300-1)	
LNAV/VNAV DA		1558-1½ 310 (300-1½)	
LNAV MDA		1620-1 372 (400-1)	
CIRCLING		1720-1 450 (500-1) 1760-1 490 (500-1) 1800-1½ 530 (600-1½) 2140-2¾ 870 (900-2¾)	