

LOC/DME I-DQJ
111.55
Chan **52 (Y)**

APP CRS
214°

Rwy Idg
TDZE **887**
Apt Elev **887**

ILS or LOC RWY 21

DANE COUNTY RGNL/TRUAX FLD (MSN)



⚠

For inop MALSR, increase S-LOC 21 Cat C/D visibility to 1¾ mile.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 on MSN VORTAC R-282 to IMMES INT/MSN 9.2 DME and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.625	UNICOM 122.95
-----------------------------	--	--	-------------------------------	----------------------------	-------------------------

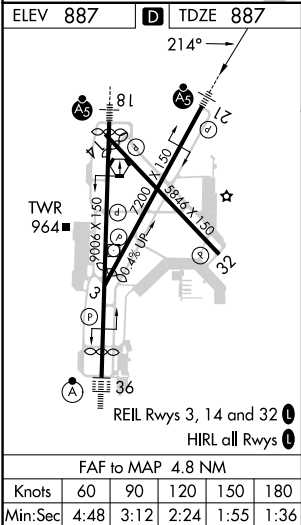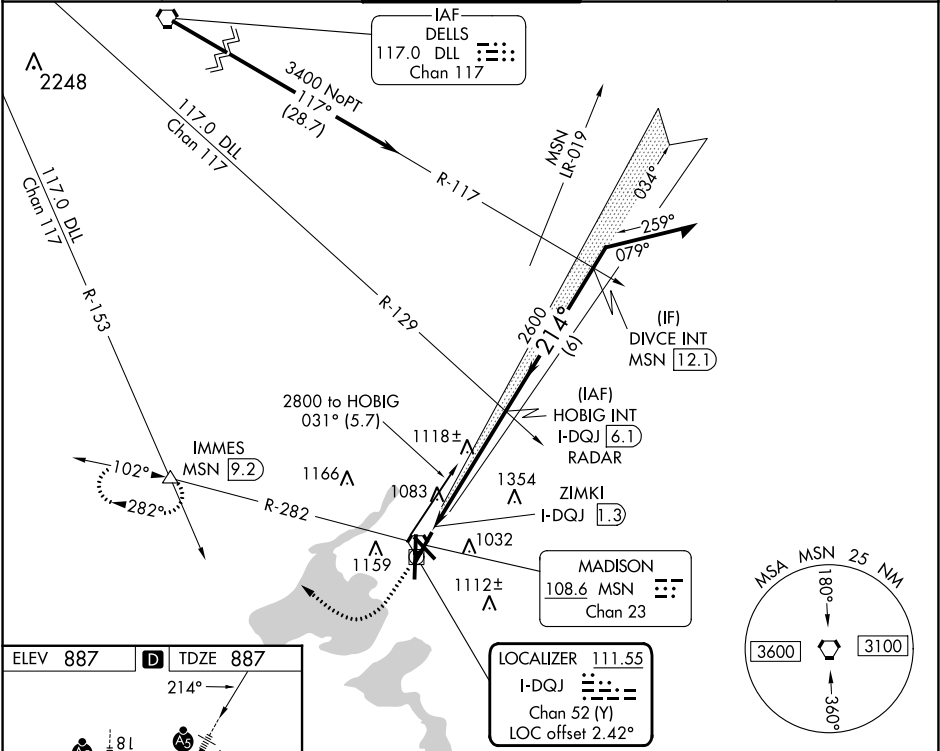

1500	2700	IMMES	HOBIG INT	Remain within 10 NM
↑	MSN R-282	△	I-DQJ 6.1 / RADAR	
* LOC only	* I-DQJ 2.4	ZIMKI I-DQJ 1.3	2600	034°
			214°	2800
			2600	GS 3.00° TCH 53
	0.3	1.1 NM	3.7 NM	
CATEGORY	A	B	C	D
S-ILS 21	1137-½ 250 (300-½)			
S-LOC 21	1380-½ 493 (500-½)		1380-1 493 (500-1)	
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-½)	1700-2¾ 813 (900-2¾)