

TACAN NYL Chan 84	APCH CRS 208°	Rwy Idg 13,300 TDZE 193 Arpt Elev 213
----------------------	------------------	---

YUMA MCAS/YUMA INTL (KNYL)

* When ALS inop, increase vis to 1 3/8 miles.



MISSED APPROACH: Climbing right turn to 4000 intercept NYL TACAN R-342 to JIMUK and hold, continue climb-in-hold to 4000.

ATIS★
118.8 273.5

APP CON
124.7 371.975

TOWER ★
119.3 (CTAF) 377.075

GND CON
121.9 314.0


CLNC DEL
118.0 336.4

ASR/
PAR


Request holding from Los Angeles
ARTCC prior to frequency change
to MCAS Yuma Approach Control.

CAUTION:
Short intermediate, recommend early configuration.

CAUTION: R-2507 and R-2512 located approximately 33 NM/28 NM NW respectively of NYL TACAN.

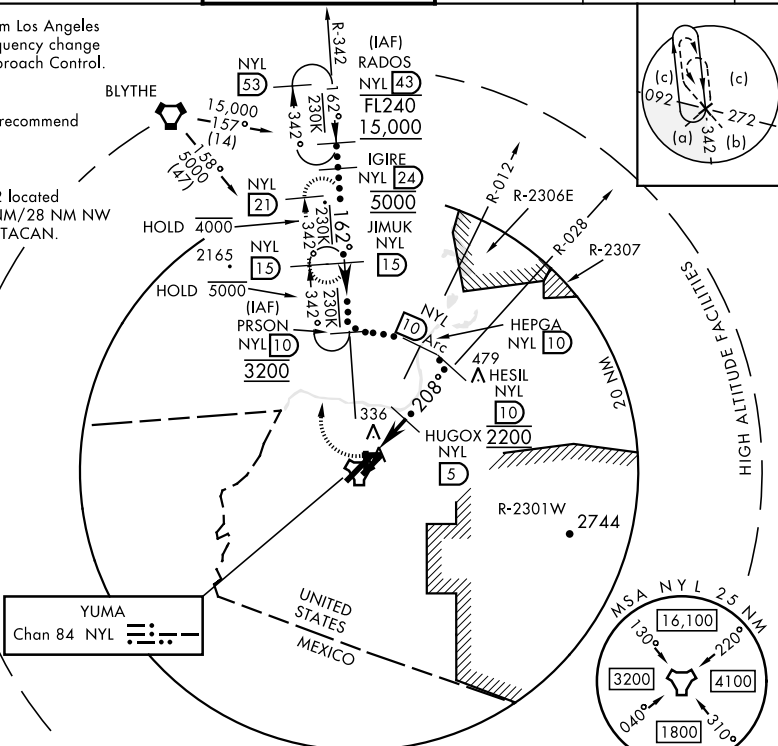


EMERG SAFE ALT 100 NM 17,100

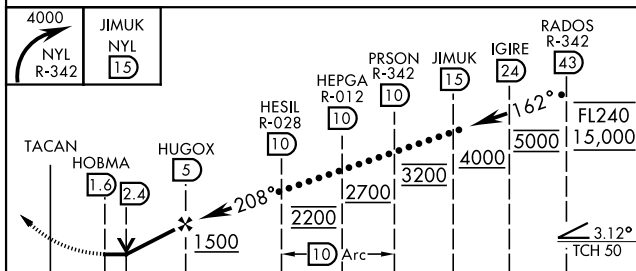

4	3.4 NM		
CATEGORY	C	D	E
S-21R *	640-7/8	447	(500-7/8)
CIRCLING	800-1 1/2 587 (600-1 1/2)	800-2 587 (600-2)	

ELEV 213	TDZE 193
3L-21R 13,300 x 200	
3R-21L 9239 x 150	
8-26 6146 x 150	
17-35 5710 x 150	



HI-TACAN Z RWY 21R