

LOC I-OPF 110.5	APP CRS 093°	Rwy Idg 8002 TDZE 8 Apt Elev 8
---------------------------	------------------------	---

ILS or LOC RWY 9L
MIAMI-OPA LOCKA EXEC(OPF)

⚠ Inop table does not apply. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.
⚠ Caution: Lights on highway 0.7 NM north may be mistaken for runway.
When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet and Circling Cat D visibility $\frac{1}{4}$ SM. For inop MALSR, increase S-LOC 9L Cats A and B visibility to 1 mile and Cats C and D visibility to $1\frac{1}{2}$ miles. ZOLTA Fix Minimums, for inop MALSR, increase S-LOC 9L all Cats visibility to 1 mile. ZOLTA Fix Minimums, for inop MALSR, when using Miami Intl altimeter setting, increase Cats A and B visibility to 1 mile and Cats C and D visibility to $1\frac{1}{2}$ miles. For inop MALSR, when using Miami Intl altimeter setting, increase S-ILS 9L all Cats visibility to $\frac{7}{8}$ mile.




MALSR



MISSED APPROACH: Climb to 2000 heading 093° and DHP VORTAC R-069 to JANUS INT/DHP 42.5 DME and hold.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
----------------------	---------------------------------------	--	---------------------------	--------------------------	----------------------

RADAR REQUIRED

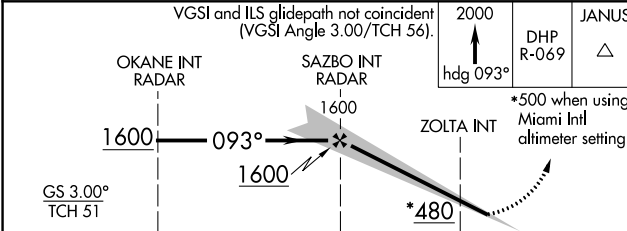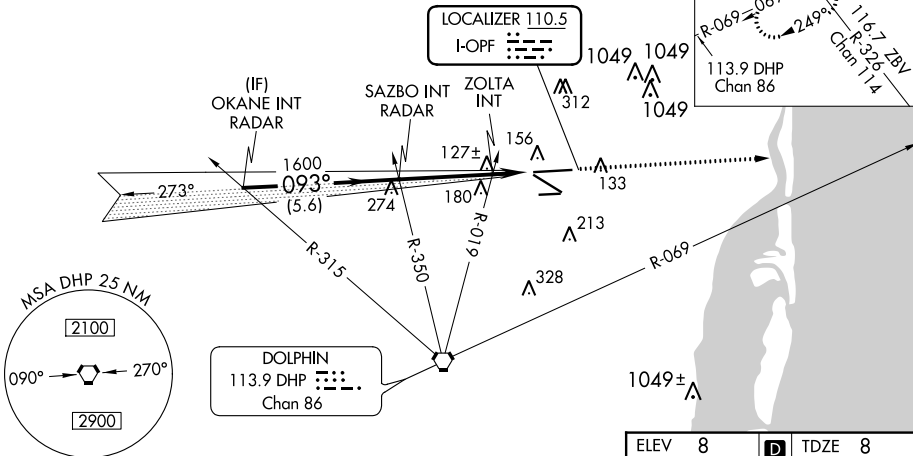

CATEGORY	A	B	C	D
S-ILS 9L		258- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	
S-LOC 9L	480- $\frac{3}{4}$	472 (500- $\frac{3}{4}$)	480-1	472 (500-1)
CIRCLING	540-1	532 (600-1)	620-1 $\frac{3}{4}$ 612 (700-1 $\frac{3}{4}$)	740-2 $\frac{1}{4}$ 732 (800-2 $\frac{1}{4}$)
ZOLTA FIX MINIMUMS				
S-LOC 9L		380- $\frac{3}{4}$	372 (400- $\frac{3}{4}$)	
CIRCLING	540-1	532 (600-1)	620-1 $\frac{3}{4}$ 612 (700-1 $\frac{3}{4}$)	740-2 $\frac{1}{4}$ 732 (800-2 $\frac{1}{4}$)

