




WAAS CH 65837 W28D	APP CRS 273°	Rwy Idg TDZE Apt Elev	7500 667 680
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 28L

CHICAGO O'HARE INTL (ORD)

RNP APCH.	ALSF-2	MISSED APPROACH: Climb 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19C or above 54C. Use of FD or AP required during simultaneous operations.		

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	124.125 GND CON 118.05 (TWR NORTH) 226.675 (TWR SOUTH) (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	---	---	--------------------------	-------

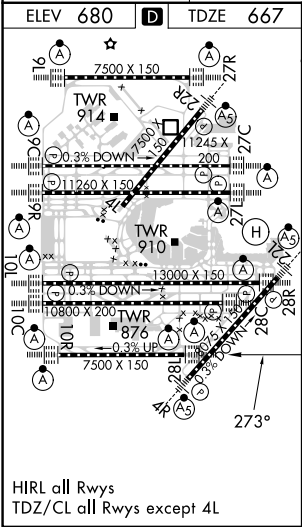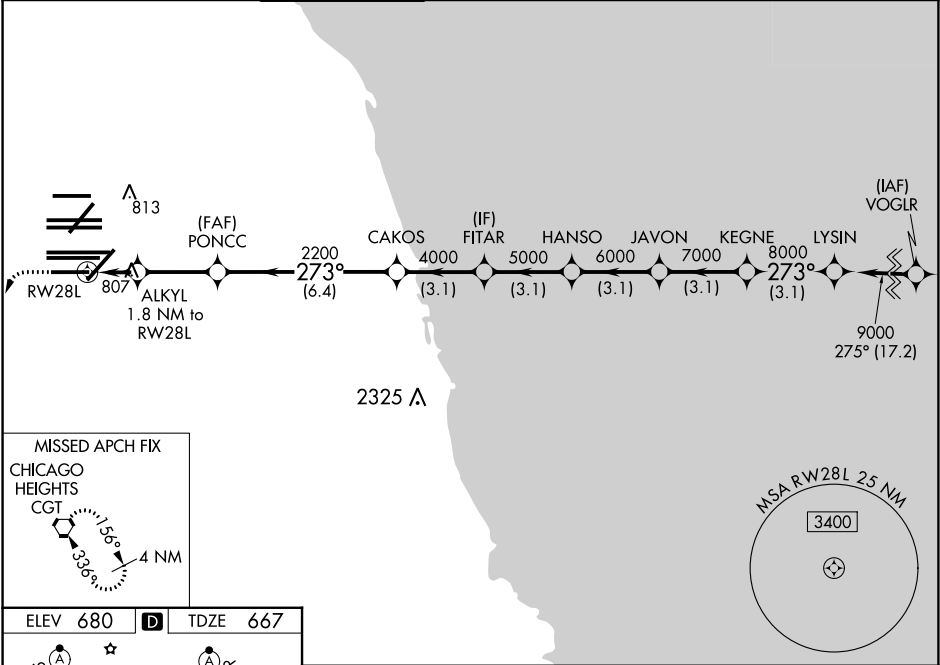

1200	4000	CGT												
														
* LNAV only.														
ALKYL 1.8 NM to RW28L			CAKOS		FITAR		HANSO		JAVON		KEGNE		LYSIN	
2200			2200		4000		5000		6000		7000		8000	
* 1.1 NM to RW28L			2200		4000		5000		6000		7000		8000	
RW28L			2200		4000		5000		6000		7000		8000	
1.1 NM			0.7		2.9 NM		6.4 NM		3.1 NM		3.1 NM		3.1 NM	
CATEGORY			A		B		C		D		GP 3.00° TCH 55			
LPV DA		867/18 200 (200-½)												
LNAV/ VNAV		1090/40 423 (500-¾)												
LNAV MDA		1060/24 393 (400-½)						1060/35 393 (400-⅝)						