

KIANA, ALASKA

AL-10234 (FAA)

22195

WAAS CH 63143 W25A	APP CRS 253°	Rwy Idg 4000 TDZE 175 Apt Elev 179
--	------------------------	---

RNAV (GPS) RWY 25

BOB BAKER MEML (IAN) (PAIK)

RNP APCH-GPS.

	Circling NA north of Rwy 7-25.
NA	Circling Rwy 7 NA at night.
 -29°C	Baro-VNAV NA.


MISSED APPROACH: Climb to 900 then climbing left turn to 2900 direct KOBXU and hold.
 *Missed approach requires minimum climb of 335 feet per NM to 1440.

AWOS-3P
119.025

ANCHORAGE CENTER
119.2 263.0


CTAF
122.70

MISSED APCH FIX

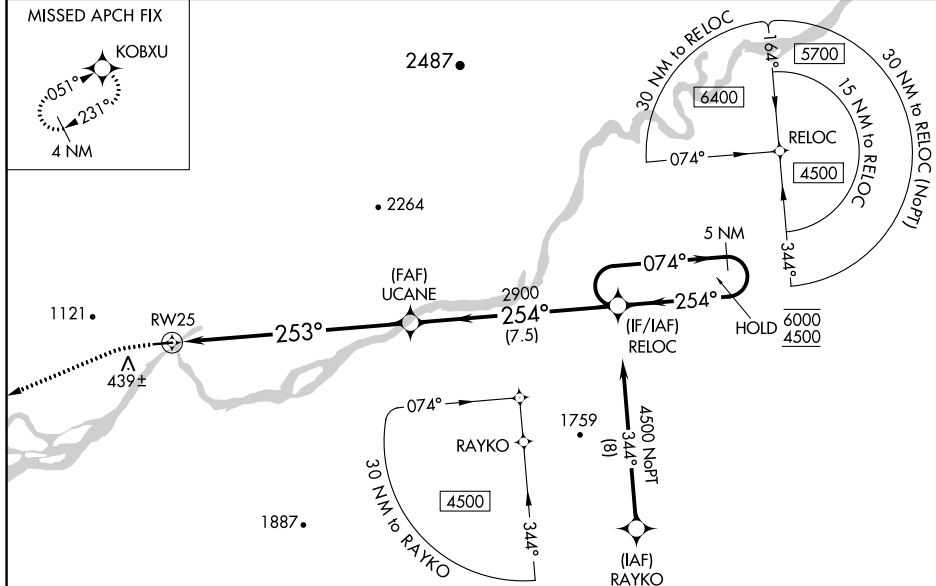

ELEV 179

TDZE 175

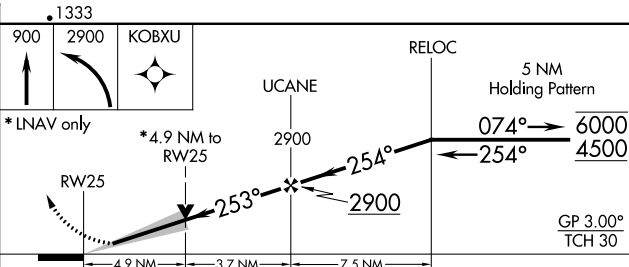

CATEGORY		A	B	C	D
LPV	DA#	450-1 275 (300-1)			
LPV	DA	639-1 $\frac{3}{8}$ 464 (500-1 $\frac{3}{8}$)			
INAV/ VNAV	DA	807-1 $\frac{3}{4}$ 632 (700-1 $\frac{3}{4}$)			
INAV	MDA	1740-1 $\frac{1}{4}$ 1565 (1600-1 $\frac{1}{4}$)	1740-1 $\frac{1}{2}$ 1565 (1600-1 $\frac{1}{2}$)	1740-3 1565 (1600-3)	
 CIRCLING		1740-1 $\frac{1}{4}$ 1561 (1600-1 $\frac{1}{4}$)	1740-1 $\frac{1}{2}$ 1561 (1600-1 $\frac{1}{2}$)	1740-3 1561 (1600-3)	

MIRL Rwy 7-25 **L**

REIL Rwy 25 L

BOB BAKER MEML (IAN) (PAIK)

RNAV (GPS) RWY 25

KIANA, ALASKA
Amdt 1A 14JUL22

66°59'N-160°26'W

AK, 25 JAN 2024 to 21 MAR 2024

APP CRS
022°

Rwy Idg
TDZE
Apt Elev

N/A
N/A
181

RNAV (GPS)-A

BOB BAKER MEML (IAN) (PAIK)

RNP APCH.


NA

-29°C

Circling to Rwy 7 NA at night.
Circling NA north of Rwy 7-25.

MISSED APPROACH: Climb to 1900 then climbing left turn to 4200 direct FARME and hold.

AWOS-3P 119,025	ANCHORAGE CENTER 119.2 263.0	CTAF 122.7
--------------------	---------------------------------	---------------

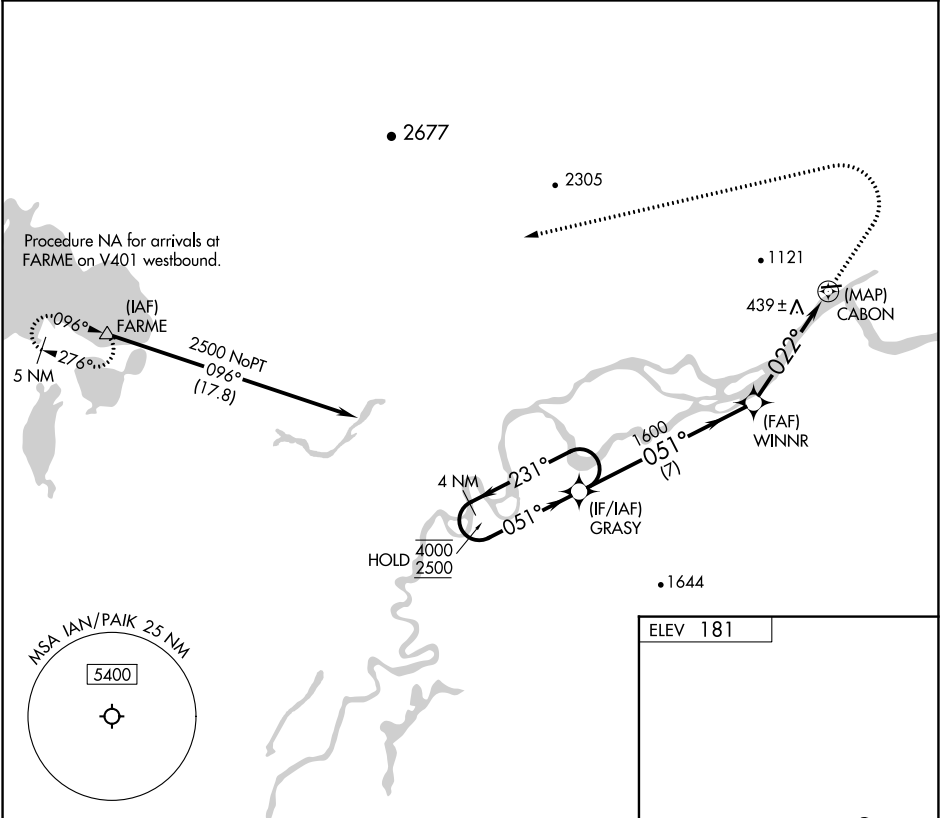

4 NM Holding Pattern

GRASY

WINNR

CABON

1900

4200

FARME

4000

2500

231°

051°

051°

022°

7 NM

4.8 NM

4000 X 75

0.8% UP

022° to CABON

CATEGORY	A	B	C	D
CIRCLING	800-1 619 (700-1)	820-1 639 (700-1)	1220-3 1039 (1100-3)	

MIRL Rwy 7-25
REIL Rwy 25