


VORTAC RBL 115.7 Chan 104	APP CRS 328°	Rwy Idg 5431 TDZE 352 Apt Elev 352
---	------------------------	---

VOR RWY 33
RED BLUFF MUNI (RBL)

T When local altimeter setting not received, use Redding altimeter
A setting and increase all MDAs 80 feet and all Cat C/D visibilities
1/4 SM.

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

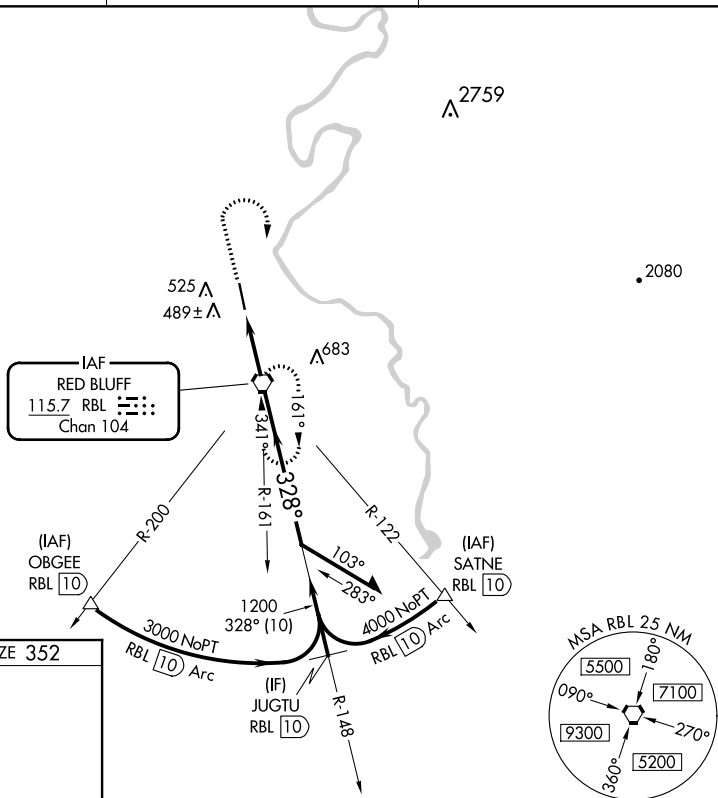

ELEV 352

TDZE 352

51 d

33 v

328°

541 X 100

MIRL Rwy 15-33

REIL Rws 15 and 33

FAF to MAP 2.7 NM					
Knots	60	90	120	150	180
Min:Sec	2:42	1:48	1:21	1:05	0:54

CATEGORY	A	B	C	D
S-33	740-1 388 (400-1)			740-1¼ 388 (400-1¼)
CIRCLING	880-1 528 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)