




VORTAC RBL <u>115.7</u> Chan 104	APP CRS 149°	Rwy Idg 5431 TDZE 352 Apt Elev 352
---	------------------------	---

VOR/DME RWY 15
RED BLUFF MUNI (RBL)


T When local altimeter setting not received, use Redding
A altimeter setting and increase all MDAs and all Cat C/D
visibility $\frac{1}{4}$ SM. VDP NA with Redding altimeter setting.

MISSED APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

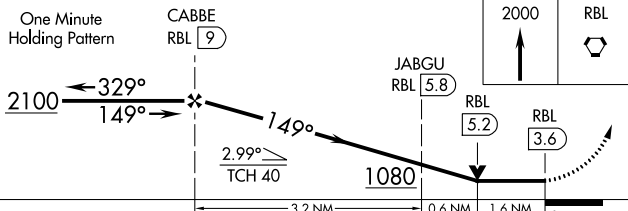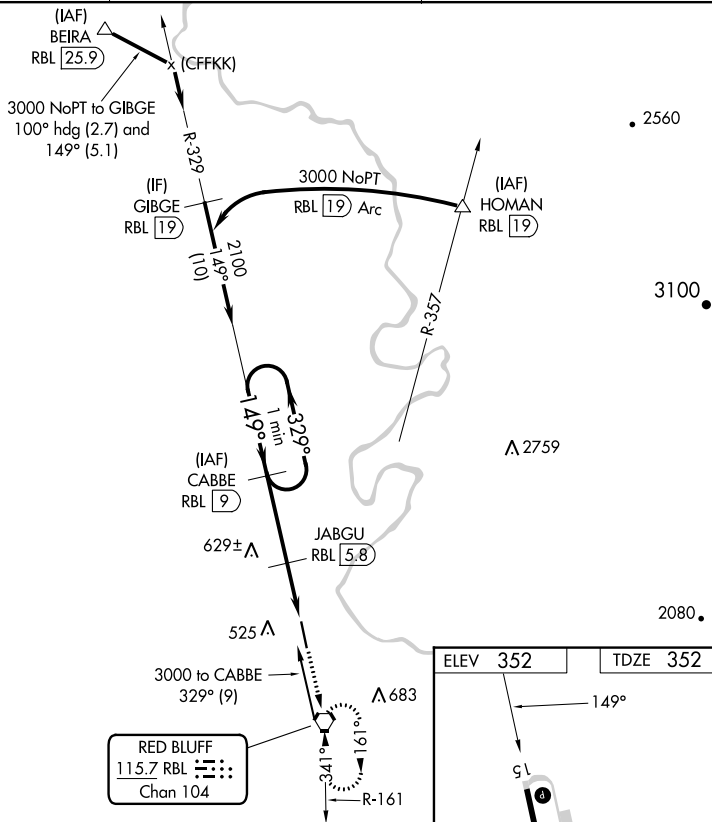

CATEGORY	A	B	C	D
S-15	880-1 528 (600-1)	880-1½ 528 (600-1½)		
 CIRCLING	880-1 528 (600-1)	900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)	

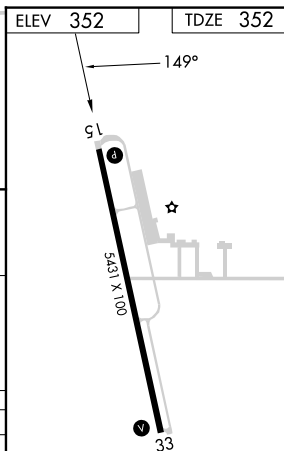

MIRL Rwy 15-33 **L**
REIL Rwy 15 and 33 **L**