

LOC I-RIW <u>110.5</u>	APP CRS 284°	Rwy Idg TDZE Apt Elev	8204 5459 5516
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 28
CENTRAL WYOMING RGNL (RIW)


T When local altimeter setting not received, use Lander altimeter setting: increase
A NA DA to 5713 feet; increase all MDA 60 feet and S-LOC 28 Cat C and D visibility
 ¼ mile. For Inop MALSR, when using Lander altimeter setting, increase S-ILS 28
 all Cts visibility to ¾ mile and S-LOC 28 Cat C and D visibility to 1¾ mile.
 VDP NA when using Lander altimeter setting.

MALSR



MISSED APPROACH: Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold, continue climb-in-hold to 7700.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

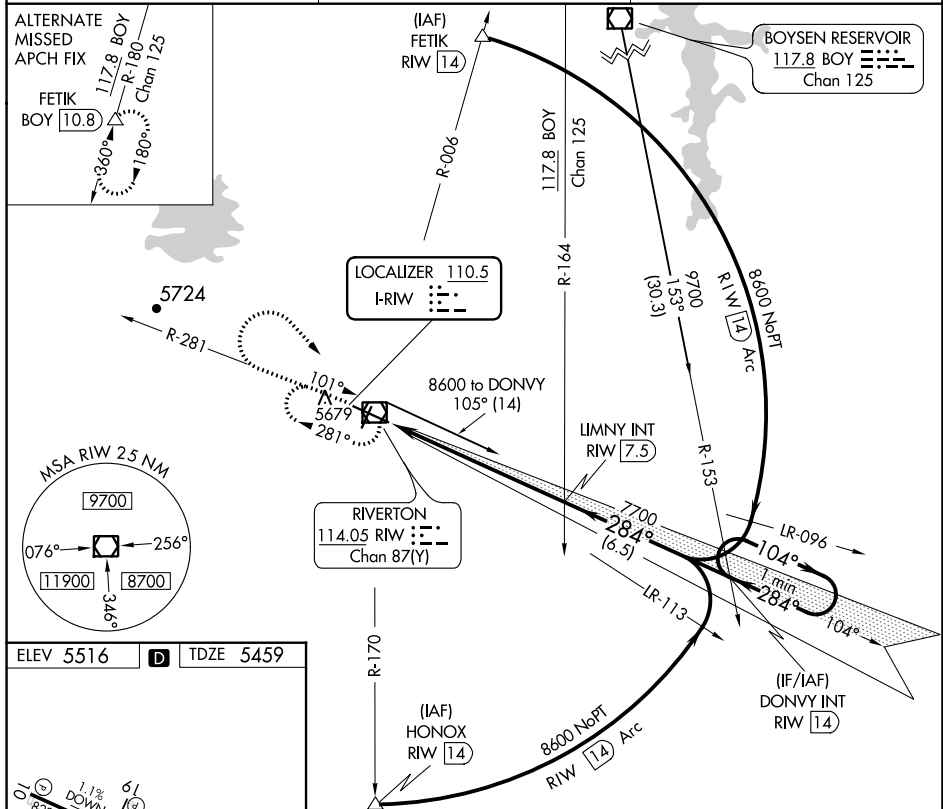

REIL Rws 1, 10 and 19
MIRL Rwy 1-19
HIRL Rwy 10-28

FAF to MAP 6.9 NM					
Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

CIRCLING

Category	A	B	C	D
S-ILS 28	5659-½ 200 (200-½)			
S-LOC 28	5880-½ 421 (400-½)		5880-¾ 421 (400-¾)	
CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½) 6120-2 604 (700-2)	

NW-1, 22 FEB 2024 to 21 MAR 2024