


WAAS CH 69302 W21A	APP CRS 215°	Rwy Idg 13000 TDZE 3633 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 21

ROSWell AIR CENTER (ROW)

RNP APCH-GPS.					MALSR 	MISSED APPROACH: Climb to 6300 direct GICEC and hold.	
▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3979 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 4075 feet and all visibilities 1/4 SM; increase all MDAs 80 feet and LNAV Cat C/D visibility 1/8 SM and Circling Cat D visibility 1/4 SM. Baro-VNAV and VDP NA when using Artesia altimeter setting. For inop ALS, increase LPV all Cats visibility to 3/8 SM, and LNAV/VNAV all Cats visibility to 1 SM. For inop ALS when using Artesia altimeter setting, increase LPV all Cats visibility to 1 SM and LNAV/VNAV all Cats visibility to 1 1/8 SM.							
ATIS 128.45 306.2		ROSWell APP CON ★ 119.6 239.0		ROSWell TOWER ★ 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95

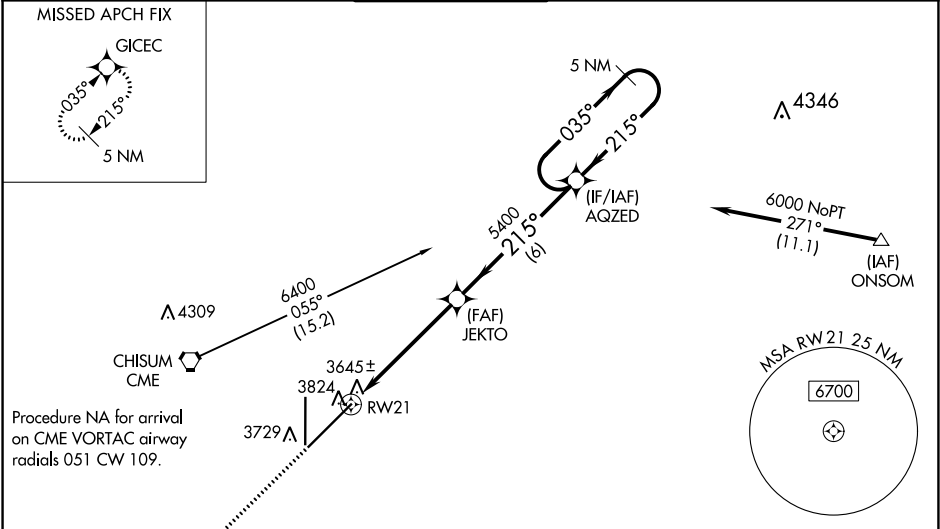

ELEV 3671		D		TDZE 3633	
CATEGORY		A	B	C	D
LPV	DA	3899-1/2 266 (300-1/2)			
LNAV/VNAV	DA	3995-5/8 362 (400-5/8)			
LNAV	MDA	4080-1/2 447 (500-1/2)		4080-7/8 447 (500-7/8)	
CIRCLING		4140-1 1/4 469 (500-1 1/4)		4140-1 1/2 469 (500-1 1/2)	4300-2 629 (700-2)

ELEV 3671		D		TDZE 3633	
CATEGORY		A	B	C	D
LPV	DA	3899-1/2 266 (300-1/2)			
LNAV/VNAV	DA	3995-5/8 362 (400-5/8)			
LNAV	MDA	4080-1/2 447 (500-1/2)		4080-7/8 447 (500-7/8)	
CIRCLING		4140-1 1/4 469 (500-1 1/4)		4140-1 1/2 469 (500-1 1/2)	4300-2 629 (700-2)

ELEV 3671		D		TDZE 3633	
CATEGORY		A	B	C	D
LPV	DA	3899-1/2 266 (300-1/2)			
LNAV/VNAV	DA	3995-5/8 362 (400-5/8)			
LNAV	MDA	4080-1/2 447 (500-1/2)		4080-7/8 447 (500-7/8)	
CIRCLING		4140-1 1/4 469 (500-1 1/4)		4140-1 1/2 469 (500-1 1/2)	4300-2 629 (700-2)