

WAAS CH 50108 W27A	APP CRS 274°	Rwy Idg 8412 TDZE 774 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 27L
SOUTH BEND INTL (SBN)

RNP APCH - GPS


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C
A or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1 $\frac{3}{8}$ SM.
 Circling Rwy 27R NA at night.

MAI SR



MISSED APPROACH: Climb to 2600 direct TOKOC and hold

ATIS 120.675	SOUTH BEND APP CON ★ 118.55 257.8	SOUTH BEND TOWER ★ 135.675 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 121.9
-----------------	--------------------------------------	--	------------------	-------------------

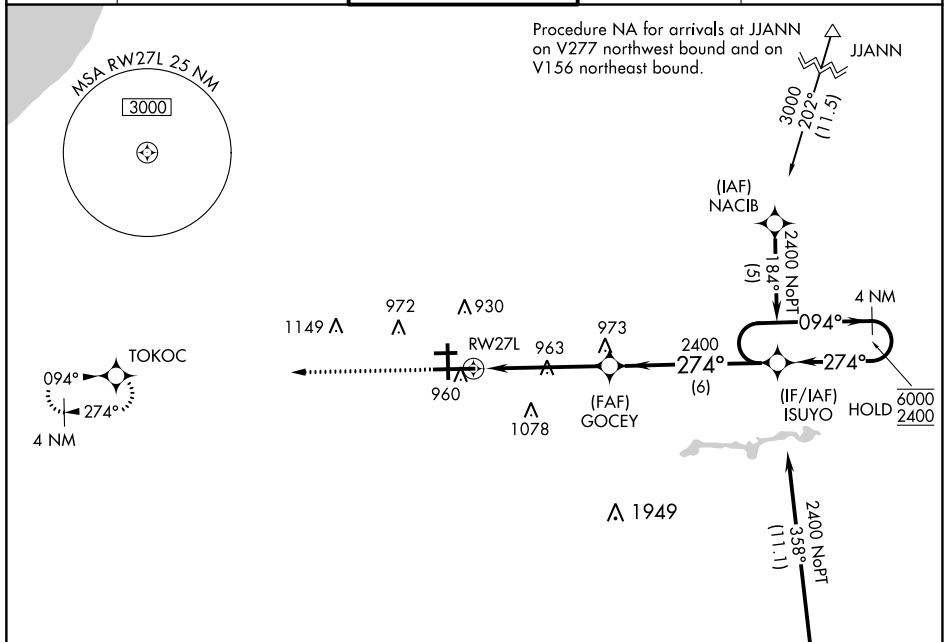

ELEV 798	D	TDZE 774
----------	----------	----------

Procedure NA for arrival on GSH
VORTAC airway radials 270 CW 060.

