

APP CRS
170°

Rwy Idg 10000
TDZE 485
Apt Elev 501

RNAV (RNP) Z RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH. RF required.

▼


For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1 1/2 SM. Simultaneous approach authorized, except for arrivals at KAEDN, ALANB, and COBLR.

MALSR

AS

MISSED APPROACH: Climb to 3000 on track 170° to TEYUD right turn to JIPAD and on track 292° to NADDI and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
-------------------	-------------------------------------	---------------------------------	------------------------	-------------------------	-------

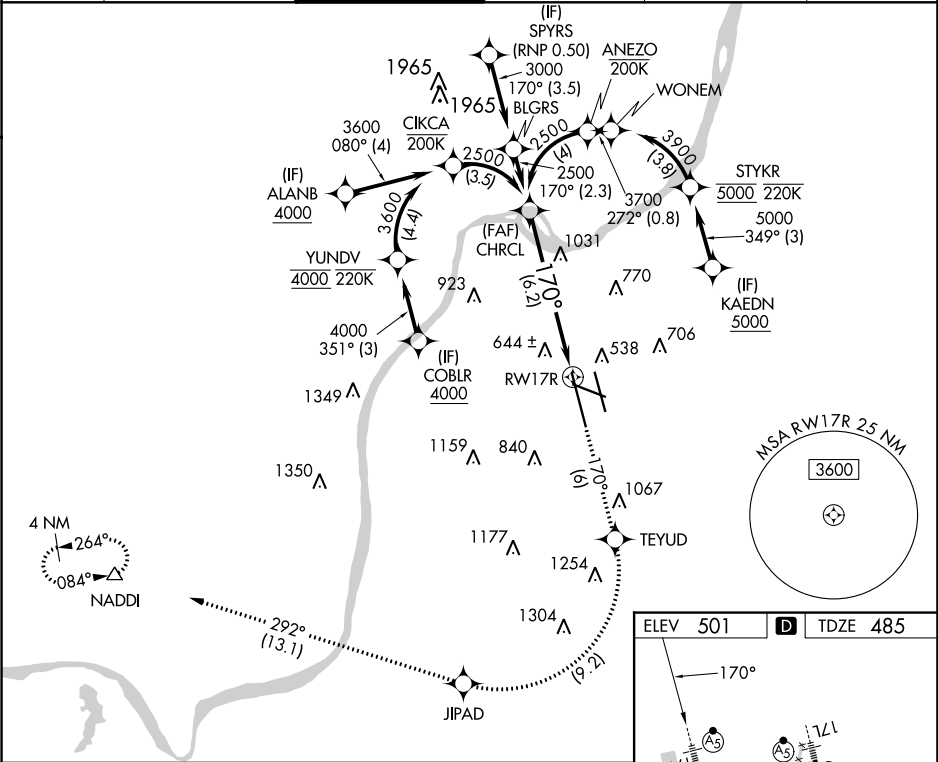

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

3000 TEYUD JIPAD tr 292° NADDI

↑ tr 170°

See planview for multiple IF locations.

2500

170°

GP 3.00° TCH 50

6.2 NM

RW17R

CATEGORY	A	B	C	D
RNP 0.30 DA	974/60 489 (500-1)			

AUTHORIZATION REQUIRED

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L and 35R