

LOC/DME I-SMX	APP CRS	Rwy Idg	8004
108.9	120°	TDZE	230
Chan 26		Apt Elev	261

ILS or LOC RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

Night Landing: Rwy 2 NA. VDP NA when using San Luis Obispo altimeter setting. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase DA to 489 feet; increase all MDA 60 feet and S-LOC visibility Cat C and D to RVR 5500. For inop MALS, increase S-LOC 12 Cat C/D visibility to 1½ mile. # RVR 1800 authorized with use of FD or AP or HUD to DA; NA when using San Luis Obispo altimeter setting.

MALS

MISSED APPROACH:
Climb to 800, then climbing left turn to 5000 direct MQO VORTAC and hold.

ATIS	SANTA BARBARA APP CON*	SANTA MARIA TOWER*	GND CON	UNICOM
121.15	124.15 327.8	118.3 (CTAF) 239.25	121.9	122.95

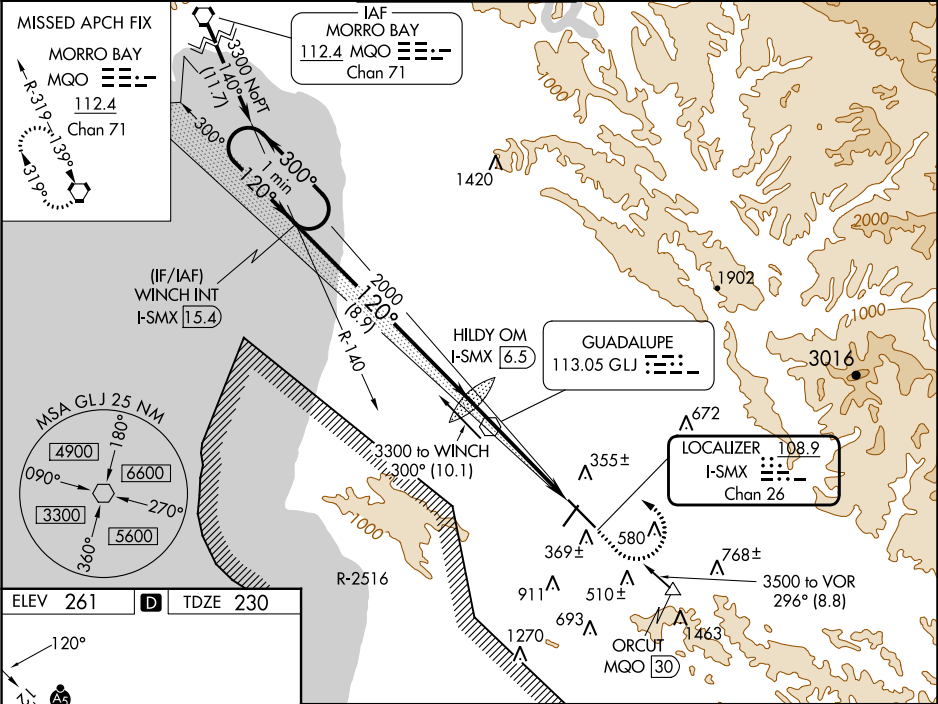

ELEV	261	TDZE	230
------	-----	------	-----

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

One Minute Holding Pattern WINCH I-SMX 15.4 HILDY OM I-SMX 6.5 3300 ← 300° → 120° → 120° → 1886 GS 3.00° TCH 55 2000 8.9 NM 3.8 NM 1.2 NM * I-SMX 2.7 I-SMX 1.5 * LOC only. 800 5000 MQO				
CATEGORY	A	B	C	D
S-ILS 12 #	430/24 200 (200-½)			
S-LOC 12	680/24 450 (500-½)		680/50 450 (500-1)	
CIRCLING	860-1 599 (600-1)	1000-1 739 (800-1)	1420-3 1159 (1200-3)	1520-3 1259 (1300-3)