

WAAS CH 97535 W28A	APP CRS 279°	Rwy Idg TDZE Apt Elev	7016 616 624
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

CHERRY CAPITAL (TVC)


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA with Bellaire altimeter setting. When local altimeter setting not received, Bellaire altimeter setting: increase DA 51 feet and all MDA 60 feet. Increase LPV all Cats visibility 1/8 mile, LNAV/VNAV visibility all Cats 1/4 mile and LNAV Cat B visibility 1/4 mile and C/D visibilities 1/8 mile and Circling Cat B/C visibility 1/4 mile. For inop MALSR, increase all LPV all Cats visibility to 1 1/4, LNAV Cats C/D visibility to 2 miles. For inop MALSR when using Bellaire altimeter setting, increase LPV all Cats visibility to 1 1/2 mile, LNAV Cats C/D visibility to 2 1/2 miles. #Missed approach requires minimum climb of 237 feet per NM to 2000.

MALSR

MISSED APPROACH:
Climb to 3000 direct
BEAR and hold.

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2 (CTAF) 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

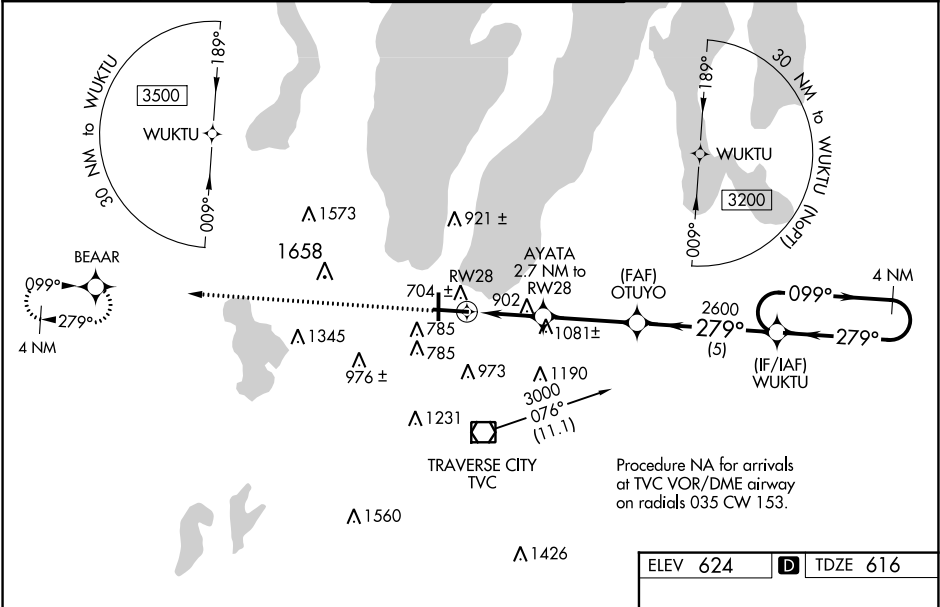

3000	BEAR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).	WUKTU	4 NM Holding Pattern
AYATA 2.7 NM to RW28	OTUYO	2600	099°	3000
2.2 NM to RW28		1520	279°	2600
2.2 NM	0.5 NM	3.4 NM	5 NM	
CATEGORY	A	B	C	D
LPV DA		# 816-1/2	200 (200-1/2)	
LPV DA		963-7/8	347 (400-7/8)	
LNAV/VNAV DA		1330-2	714 (800-2)	
LNAV MDA	1340-1/2	724 (800-1/2)	1340-15/8	724 (800-15/8)
CIRCLING	1340-1	716 (800-1)	1500-2 1/2	1720-3
			876 (900-2 1/2)	1096 (1100-3)

