

LOC I-TV 109.7	APP CRS 357°	Rwy Idg 5002 TDZE 86 Apt Elev 86
-------------------	-----------------	--

ILS or LOC RWY 36

VICKSBURG TALLULAH RGNL (TVR)

RNP APCH - GPS required for procedure entry at BARNE.


ADF required.

For inop ALS when using Vicksburg Muni, MS altimeter setting, increase S-LOC Cats C and D visibility to 1 3/8 SM. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting: increase SHLS 36 DA to 309 feet; increase all MDAs 40 feet and visibility S-LOC 36 Cats C/D 1/8 SM and Circling Cats C/D 1/4 SM.

SSALR

MISSED APPROACH:
Climb to 1200 then climbing left turn to 2100 direct TKH NDB and hold.

ASOS 118.525	MEMPHIS CENTER 132.5 259.1	UNICOM 123.0 (CTAF)
-----------------	-------------------------------	------------------------

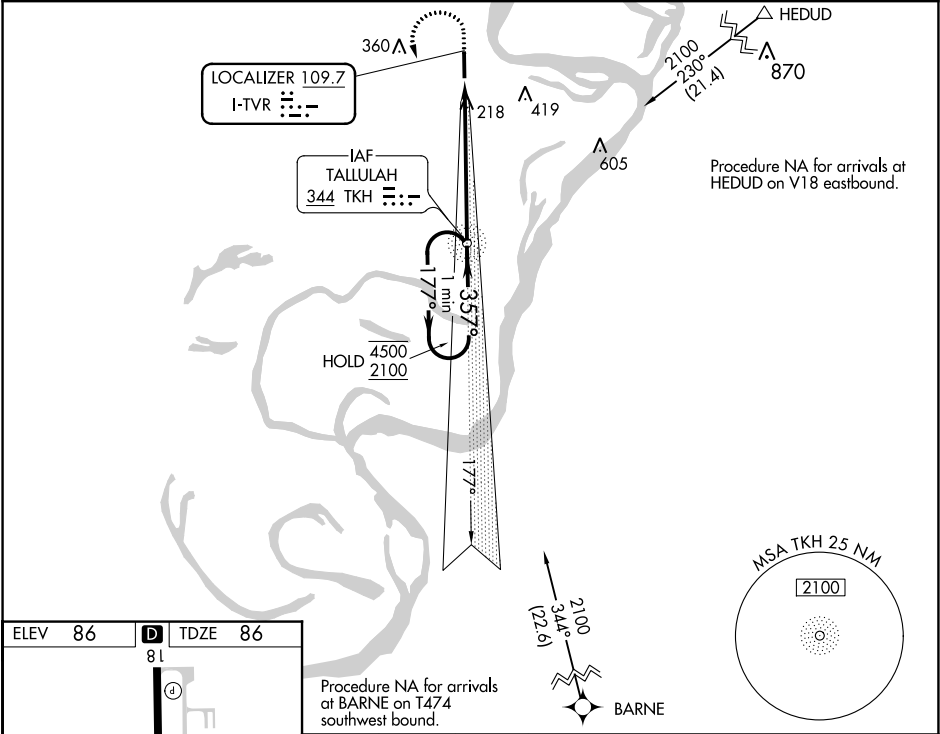

ELEV 86	D	TDZE 86
---------	---	---------

81

5002 X 100

36

357°

REIL Rwy 18

MIRL Rwy 18-36

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

1200	2100	TKH	TKH NDB	One Minute Holding Pattern
↑	↶	○	2061	177° → 4500 ↶ 357° 2100
6 NM		GS 3.00° TCH 49°		
CATEGORY	A	B	C	D
S-ILS 36	286-1/2		200 (200-1/2)	
S-LOC 36	540-1/2	454 (500-1/2)	540-7/8	454 (500-7/8)
CIRCLING	540-1	454 (500-1)	720-1 3/4 634 (700-1 3/4)	720-2 634 (700-2)

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024