

NEPHI, UTAH

AL-9496 (FAA)

22307

WAAS CH 63221 W17A	APP CRS 168°	Rwy Idg 6300 TDZE 5005 Apt Elev 5022
--	------------------------	---

RNAV (GPS) RWY 17


NEPHI MUNI (U14)

RNP APCH - GPS.


NA Baro-VNAV NA when using Provo Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5577 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5836 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV and Circling visibilities Cats A/B ½ SM. Circling Cat C NA. VDP NA with Provo Muni altimeter setting.

MISSED APPROACH:
Climb to 11 400 direct
ACAGO and on track
191° to PILTE and hold.

AWOS-3 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) U
-------------------	-------------------------------------	-----------------------------------

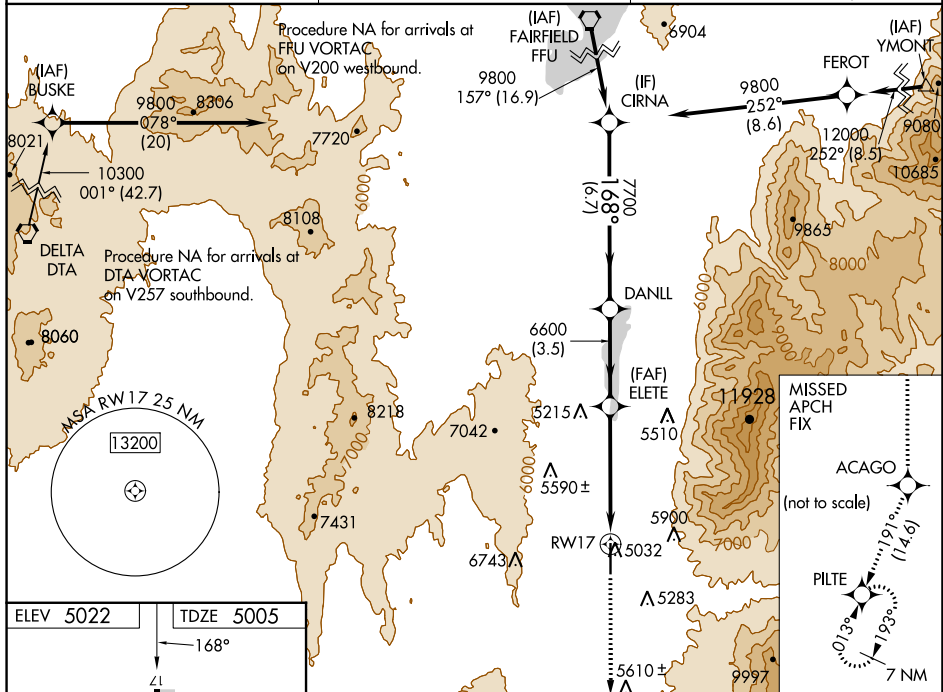

ELEV 5022		TDZE 5005
-----------	--	-----------



11400 ↑	ACAGO ✦	tr 191° ✦				
*LNAV only.			*2.4 NM to RW17			
			6600	7700	168°	9800
			6600			GP 3.00° TCH 40
			2.4 NM	2.5 NM	3.5 NM	6.7 NM
CATEGORY	A		B		C	D
LPV DA			5433-1½		428 (400-1½)	
LNAV/ VNAV DA			5692-2½		687 (700-2½)	
LNAV MDA	5800-1 795 (800-1)		5800-1¼ 795 (800-1¼)		5800-2½ 795 (800-2½)	
CIRCLING	5800-1 778 (800-1)		5800-1¼ 778 (800-1¼)		6920-3 1898 (1900-3) NA	

NEPHI, UTAH

Orig-C 03NOV22

39°44'N-111°52'W

NEPHI MUNI (U14)

RNAV (GPS) RWY 17

SW-4, 22 FEB 2024 to 21 MAR 2024

SW-4, 22 FEB 2024 to 21 MAR 2024

WAAS CH 58221 W35A	APP CRS 348°	Rwy Idg TDZE Apt Elev	6300 5022 5022
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

NEPHI MUNI (U14)

RNP APCH - GPS.	Baro-VNAV NA when using Provo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. Circling NA for Cat C east of Rwy 17 and 35. Rwy 35 helicopter visibility reduction below ¾ SM NA. VDP NA with Provo altimeter setting. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5416 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5740 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV visibility Cats B/C/D and Circling visibility Cats A/B ½ SM.	MISSED APPROACH: Climb to 8200 then climbing left turn to 10600 direct PILTE and hold.
-----------------	--	--

AWOS-3 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

