


|                                                                                                                                 |                                                     |                                                                  |                                |                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------|
| LOC I-BVD<br><b>110.1</b>                                                                                                       | APCH CRS<br><b>125°</b>                             | Rwy Idg <b>15,000</b><br>TDZE <b>265</b><br>Arpt Elev <b>368</b> | AL-770 [USSF]                  | VANDENBERG SFB (KVBG)                                                                                           |
| DME required.<br>▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile.<br>** When ALS inop, increase CAT CDE vis to 1¼ mile. |                                                     |                                                                  | ALSF-2<br>A                    | MISSED APPROACH: Climb out VBG TACAN R-119 until 20 DME (WATKN) and hold. Continue climb in hold maintain 7000. |
| ATIS<br><b>133.125 257.975</b>                                                                                                  | SANTA BARBARA<br>APP/DEP CON<br><b>124.15 327.8</b> | TOWER ★<br><b>124.95 0 326.2</b><br>(CTAF)                       | GND CON<br><b>121.75 275.8</b> | CLNC DEL<br><b>121.75 275.8</b>                                                                                 |

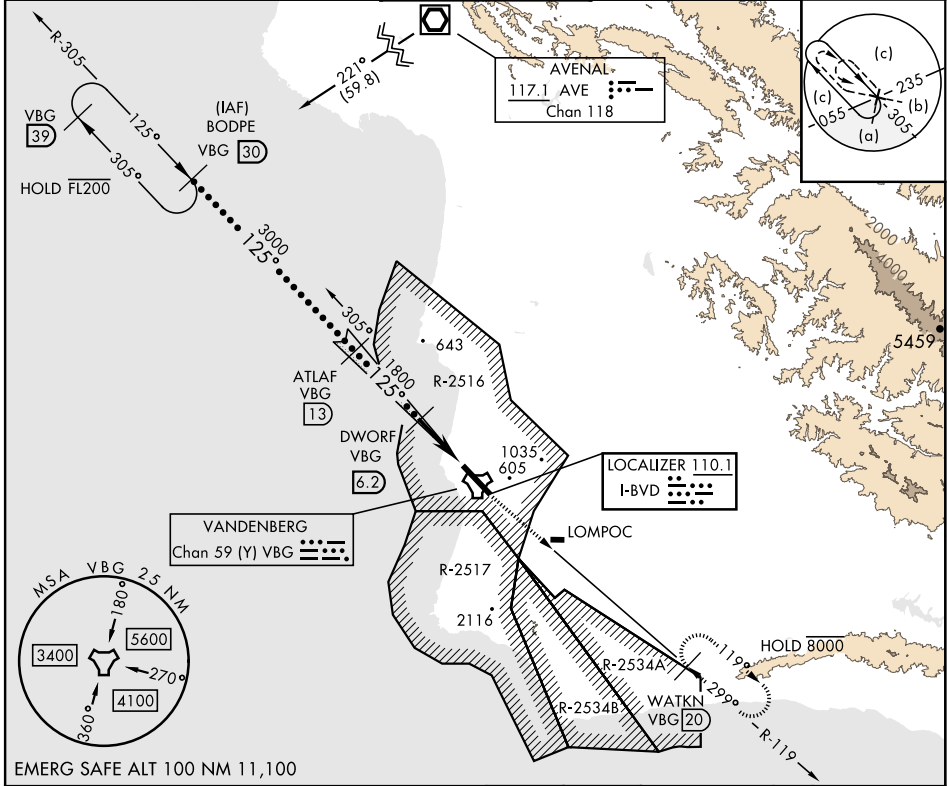

|                         |                                           |                         |                         |                                                           |          |
|-------------------------|-------------------------------------------|-------------------------|-------------------------|-----------------------------------------------------------|----------|
| BODPE<br>R-305<br>FL180 | ATLAF<br>VBG<br>13                        | DWORF<br>VBG<br>6.2     | WATKN<br>VBG<br>20      | ELEV 368<br>125°<br>315<br>284<br>15,000 x 200<br>0.9% UP | TDZE 265 |
| GS 3.00°<br>TCH 52      | VGSI and descent<br>angles not coincident | 4.3 NM                  | .5 NM                   |                                                           |          |
| CATEGORY                | C                                         | D                       | E                       |                                                           |          |
| S-ILS 12 *              | 465/24                                    | 200 (100-½)             |                         |                                                           |          |
| S-LOC/<br>DME 12 **     | 700/40                                    | 435 (400-¾)             |                         |                                                           |          |
| CIRCLING                | 1020-1¼<br>652 (700-1¼)                   | 1180-2¾<br>812 (900-2¾) | 1560-3<br>1192 (1200-3) |                                                           |          |