WAAS	APP CRS	Rwy Idg 5000
CH 48828	230°	TDZE 65
W23A		Apt Elev 65

RNAV (GPS) RWY 23

MARION COUNTY (X35)

RNP APCH.

NA Rwy 23 helicopter visibility reduction below 1 SM NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase all MDAs 60 feet, and increase LP and LNAV Cats C and D visibility ⅛ SM, and Circling Cat D ¼ SM. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct ALICS and hold, continue climb-in-hold to 3000.

OCF AWOS-3PT	JACKSONVILLE APP CON	UNICOM
128.125	118.6 251.15	122.8 (CTAF) L

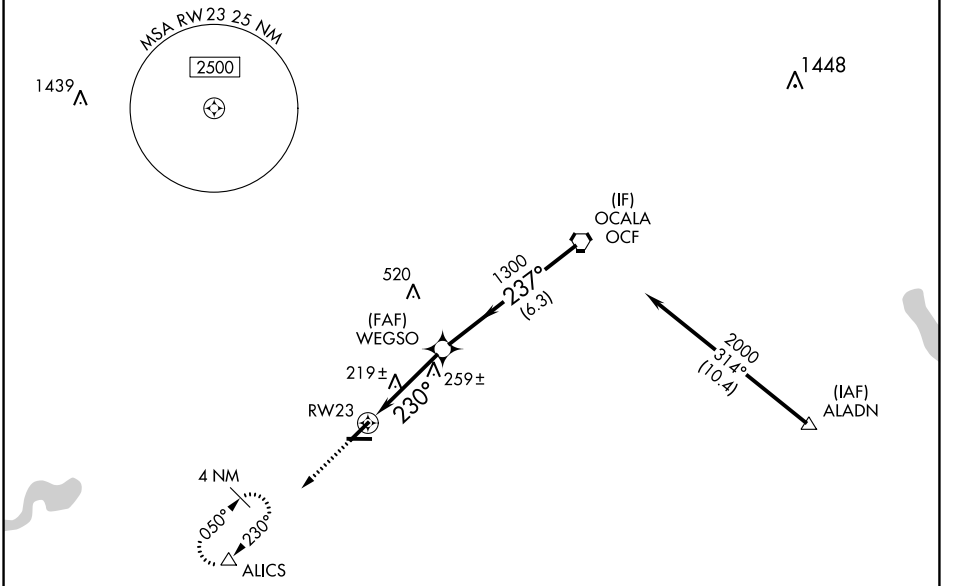

ELEV 65 TDZE 65



MIRL Rwy 5-23 and 10-28 L

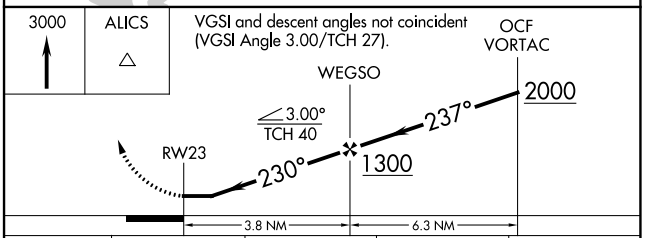

CATEGORY	A	B	C	D
LP MDA	500-1 435 (500-1)		500-1¼ 435 (500-1¼)	
LNAV MDA	540-1 475 (500-1)		540-1⅜ 475 (500-1⅜)	
CIRCLING	540-1 475 (500-1)	560-1 495 (500-1)	580-1½ 515 (600-1½)	760-2¼ 695 (700-2¼)

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024