


VOR/DME ZZV 114.95 Chan 96 (Y)	APP CRS 045°	Rwy Idg 4999 TDZE 900 Apt Elev 900
--	------------------------	---

VOR RWY 4
ZANESVILLE MUNI (ZZV)

V **A** VDP NA when using Newark altimeter setting.
When local altimeter setting not received, Newark altimeter setting and increase all MDA 80 feet; increase S-4 and Circling Cat B visibility $\frac{1}{4}$ SM and Cat C/D $\frac{1}{2}$ SM, NEBLA fix minimums increase S-4 Cat C/D visibility $\frac{1}{4}$ SM and Circling Cat C/D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3000 then left turn
direct ZZV VOR/DME and hold.


ASOS 114.95	INDIANAPOLIS CENTER 124.45 323.275	UNICOM 123.0 (CTAF) 0*
-----------------------	--	----------------------------------

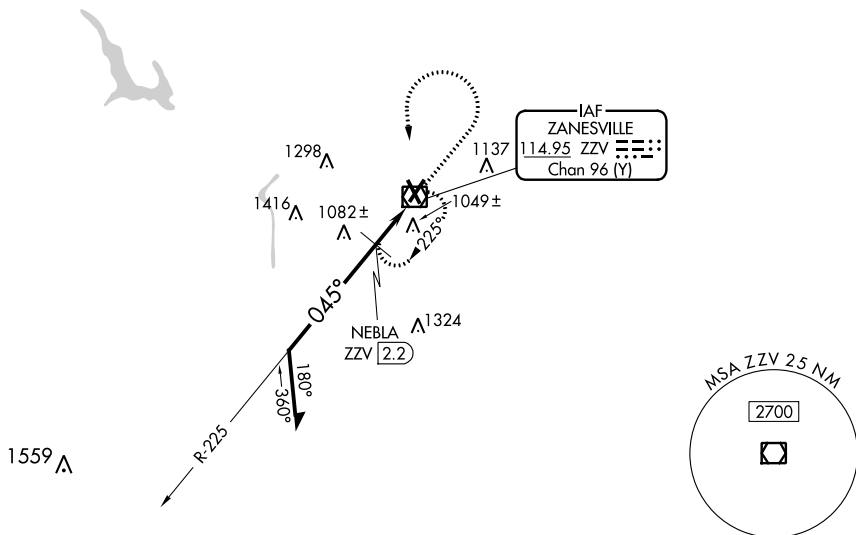

ELEV 900		TDZE 900
----------	--	----------

*1680 when using Newark altimeter setting.

Remain
within 10 NM

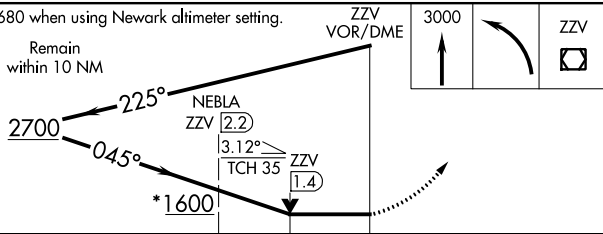

CATEGORY		A	B	C	D
S-4		1600-1	700 (700-1)	1600-2	700 (700-2)
 CIRCLING		1600-1	700 (700-1)	1620-2 720 (800-2)	1620-2 ¼ 720 (800-2 ¼)
NEBLA FIX MINIMUMS					
S-4		1340-1	440 (500-1)	1340-1 ¼	440 (500-1 ¼)
 CIRCLING		1380-1 480 (500-1)	1400-1 500 (500-1)	1620-2 720 (800-2)	1620-2 ¼ 720 (800-2 ¼)

