

TACAN RWY 19L


VORTAC ADW 113.1 Chan 78	APCH CRS 195°	Rwy Idg TDZE Arpt Elev	9756 279 280
--------------------------------	------------------	------------------------------	--------------------

AL-561 (USAF)

JOINT BASE ANDREWS (KADW)

ATC RADAR required	ALSF-1	MISSED APPROACH: Climbing to 2500 via ADW VORTAC R-183 to DOKME and hold.
* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8 miles. ** Circling not authorized W of Rwy 1L-19R.		

ATIS 133.675 251.05	POTOMAC APP CON 128.0 335.5	TOWER 118.4 349.0	GND CON 121.8 275.8	CLNC DEL 127.55 285.475	CPDLC
------------------------	--------------------------------	----------------------	------------------------	----------------------------	-------

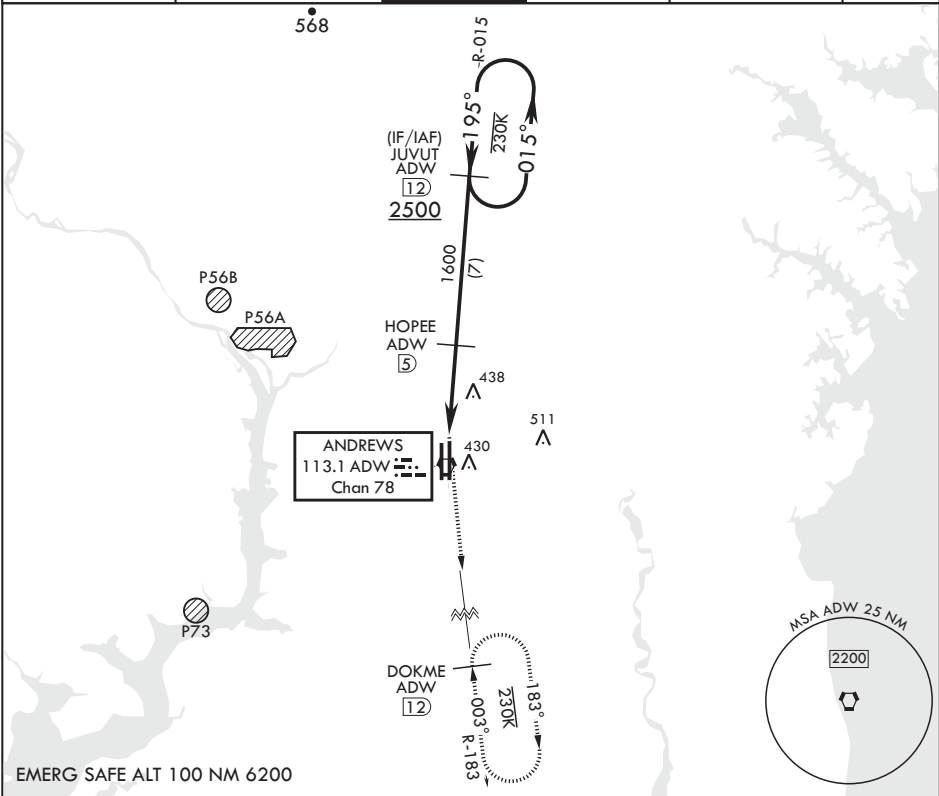

2500 ADW R-183	DOKME ADW 12	2500 ADW R-183 DOKME ADW 12 JUVUT R-015 12 HOPEE 5 1600 2500 015° 195° 195° 3.7 NM 3.02° TCH 56			
CATEGORY					
S-19L*					
CIRCLING**					

A	B	C	D	E
740/24 461 (500-½)	740/50 461 (500-1)	780-1½ 501 (600-1½)	840-2 561 (600-2)	

ELEV 280

BCN 483

TWR 435

195°

TDZE 279

861

761

931.8 x 200

97.56 x 1.50

0.3% DOWN

1L

1R

x

A

A1

HIRL all Rwy's
TDZL/CL Rwy's 1L, 19R

TACAN RWY 19L