APP CRS	Rwy Idg	5101
179°	TDZE	1227
	Apt Elev	1228

RNAV (GPS) RWY 18

WEST PLAINS RGNL (UNO)

RNP APCH - GPS.

Visibility reduction by helicopters NA. When local altimeter setting not received, use Mountain Home, AR altimeter setting: increase all MDAs 140 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM. When VGSI inop, Straight-in NA at night.

MISSED APPROACH: Climb to 4000 direct UGATY and hold.

ASOS	MEMPHIS CENTER	UNICOM
123.825	120.075 289.4	122.8 (CTAF) L

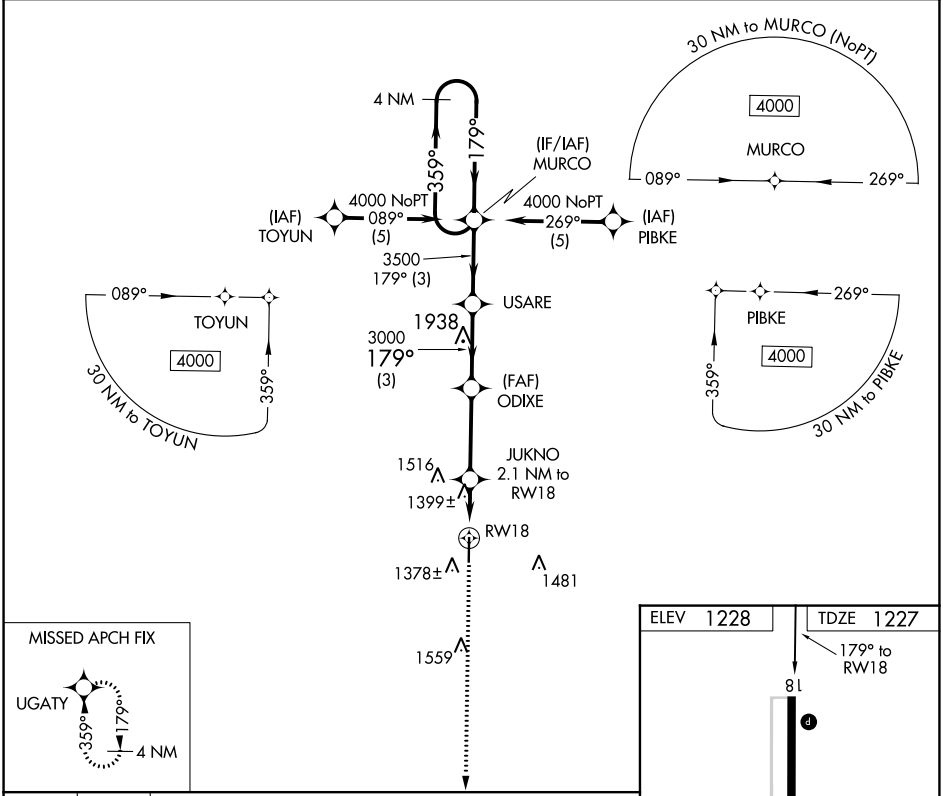

CATEGORY	A	B	C	D
LNAV MDA	1660-1 433 (500-1)		1660-1¼ 433 (500-1¼)	NA
CIRCLING	1720-1 492 (500-1)	1740-1 512 (600-1)	1820-1½ 592 (600-1½)	NA

REIL Rwys 18 and 36 L

MIRL Rwy 18-36 L

NC-3, 22 FEB 2024 to 21 MAR 2024
NC-3, 22 FEB 2024 to 21 MAR 2024

WAAS	APP CRS	Rwy Idg	5101
CH 40202	359°	TDZE	1228
W36A		Apt Elev	1228

RNAV (GPS) RWY 36
WEST PLAINS RGNL (UNO)

RNP APCH - GPS.

Baro-VNAV NA when using Mountain Home altimeter setting. Visibility reduction by helicopters NA. When local altimeter setting not received, use Mountain Home, AR altimeter setting: increase LPV DA to 1657 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1850 feet and all visibilities ¼ SM; increase all MDAs 140 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 4000 direct MURCO and hold.

ASOS	MEMPHIS CENTER	UNICOM
123.825	120.075 289.4	122.8 (CTAF) L

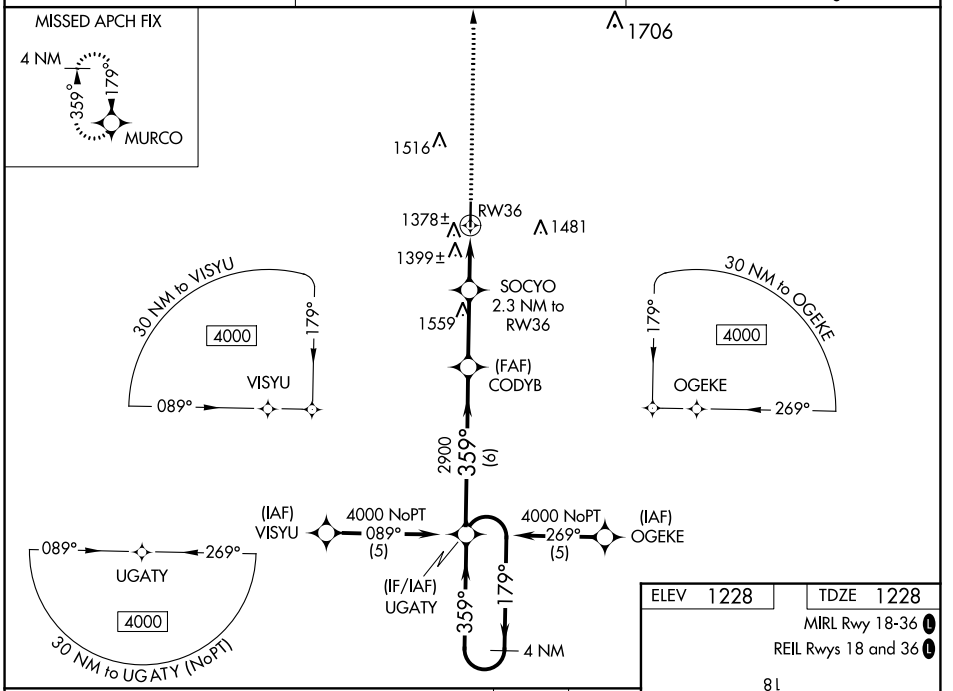

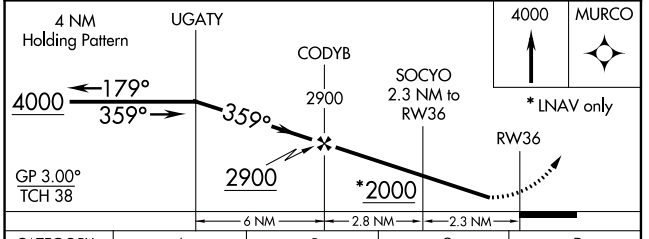

CATEGORY	A	B	C	D
LPV DA	1520-1 292 (300-1)			NA
LNAV/VNAV DA	1713-1¾ 485 (500-1¾)			NA
LNAV MDA	1660-1 432 (500-1)		1660-1¼ 432 (500-1¼)	NA
CIRCLING	1720-1 492 (500-1)	1740-1 512 (600-1)	1820-1½ 592 (600-1½)	NA

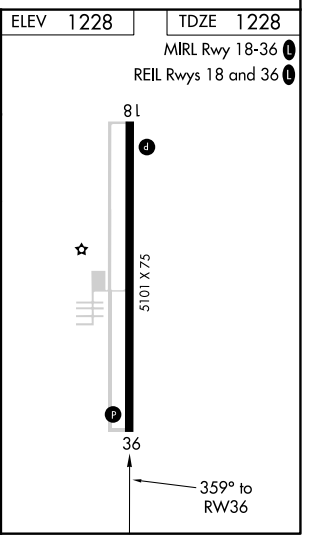

NC-3, 22 FEB 2024 to 21 MAR 2024
NC-3, 22 FEB 2024 to 21 MAR 2024