

TAMPA, FLORIDA

AL-416 (FAA)



23222

WAAS CH 49100 W 19A	APP CRS 187°	Rwy Idg 8300 TDZE 26 Apt Elev 26
---	------------------------	---

RNAV (GPS) Z RWY 19L
TAMPA INTL (TPA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	ALSIF-2 	MISSED APPROACH: Climb to 2800 direct CUPUL and on track 147° to GIBBS and hold.
---	-------------	---

ARR 126.45	D-ATIS	DEP 128.475	TAMPA APP CON 118.5 307.175	TAMPA TOWER 119.5 269.4	GND CON 121.7 269.4	CLNC DEL 133.6	CPDLC
-------------------	--------	--------------------	------------------------------------	--------------------------------	----------------------------	-----------------------	-------

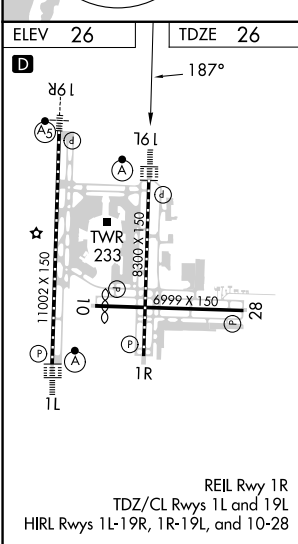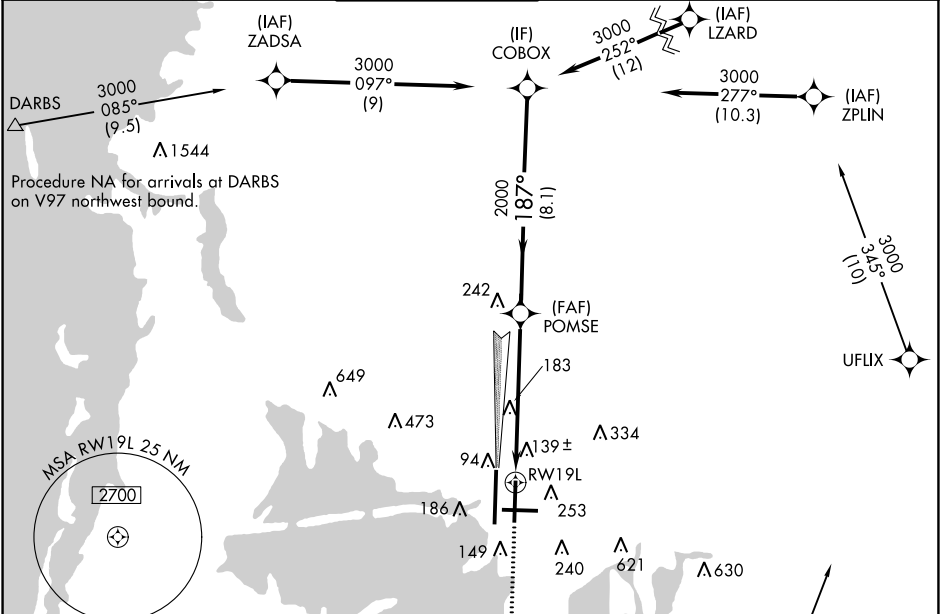

MISSED APCH FIX			
2800	CUPUL	GIBBS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).
		tr 147°	
*LNAV only. *1.2 NM to RWY19L			
Procedure Turn NA			
GP 3.00° TCH 51			
CATEGORY	A	B	C
LPV DA**	226/24	200 (200-½)	
LNAV/VNAV DA	440/45	414 (500-¾)	
LNAV MDA	460/24	434 (500-½)	460/40 434 (500-¾)
CIRCLING	560-1	534 (600-1)	680-1¾ 980-3 654 (700-1¾) 954 (1000-3)

TAMPA, FLORIDA
Amdt 2F 08OCT20

27°59'N-82°32'W

TAMPA INTL (TPA)
RNAV (GPS) Z RWY 19L

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024