


WAAS CH 57919 W13A	APP CRS 129°	Rwy Idg TDZE 3603 Apt Elev 3607
--	------------------------	---

RNAV (GPS) Y RWY 13
RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. ASR			MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.		
ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95

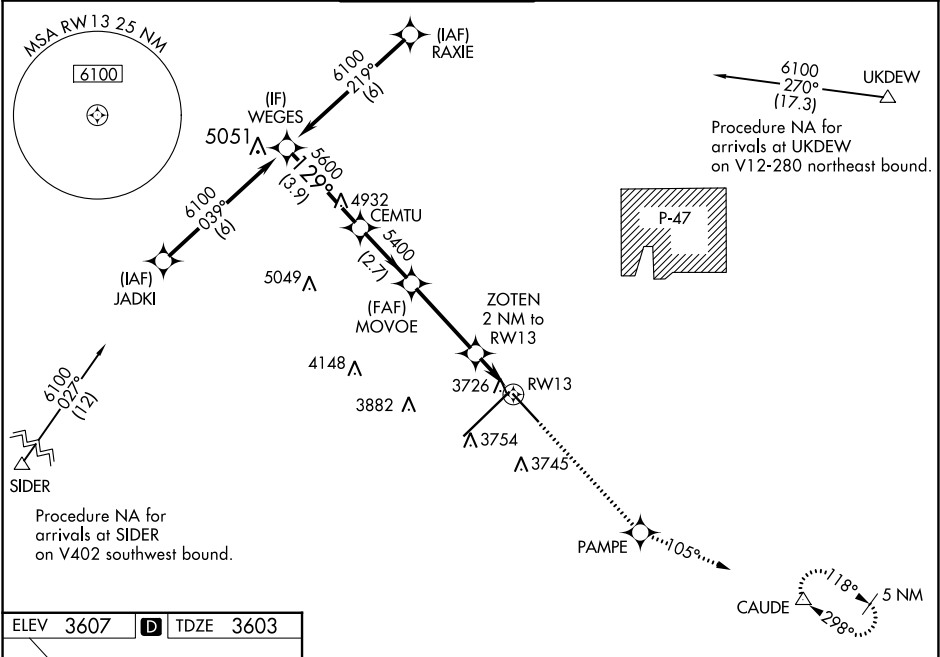

WEGES		5400	PAMPE	tr 105°	CAUDE
CEMTU		5600			
MOVOE		5400			
ZOTEN 2 NM to RW13		*4280			
RW13					
3.9 NM		2.7 NM	3.4 NM	1 NM	1 NM
CATEGORY	A	B	C	D	
LPV DA	3803-3/4 200 (200-3/4)				
LNAV/VNAV DA	3976-1 373 (400-1 1/4)				
LNAV MDA	3980-1 377 (400-1)				
CIRCLING	4080-1	473 (500-1)	4240-1 3/4 633 (700-1 3/4)	4280-2 1/4 673 (700-2 1/4)	