


WAAS CH 69405 W27A	APP CRS 271°	Rwy Idg TDZE Apt Elev 9000 3852 3877
--	------------------------	--

RNAV (GPS) X RWY 27

HELENA RGNL (HLN)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 9400 direct EKIKE and on track 359° to WOKEN and hold.
Circling NA to Rwy 10 and 28. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. Circling Rwy 5, 23, 35 NA at night. For inop ALS, increase LPV all Cats visibility to 1½ SM. Circling NA for Cat D south of Rwy 9-27.		

ATIS 120.4	HELENA APP CON ★ 119.5 229.4	HELENA TOWER ★ 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

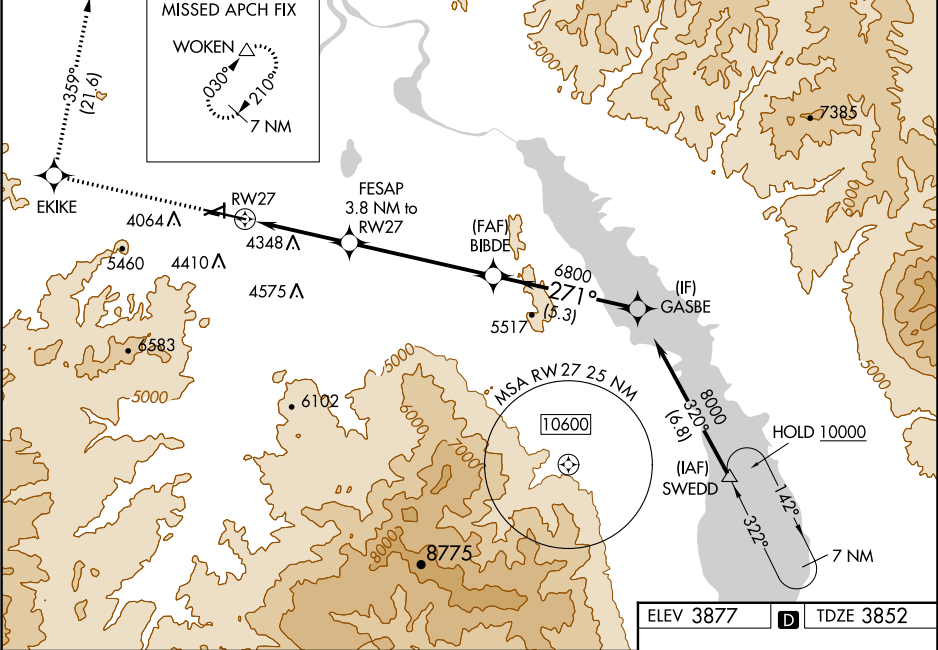

9400	EKIKE	tr 359°	WOKEN	
FESAP 3.8 NM to RW27 3.1 NM to RW27 5120 6800 271° 8000 6800 GP 3.00° TCH 55				
3.1 NM		0.8	5.3 NM	5.3 NM
CATEGORY	A	B	C	D
LPV DA	4501-1 ³ / ₈ 649 (700-1 ³ / ₈)			
LNAV/VNAV DA	4724-2 872 (900-2)			
LNAV MDA	4880- ³ / ₄ 1028 (1100- ³ / ₄)	4880-1 1028 (1100-1)	4880-2 ¹ / ₂	1028 (1100-2 ¹ / ₂)
CIRCLING	4880-1 ¹ / ₄ 1003 (1100-1 ¹ / ₄)	4880-1 ¹ / ₂ 1003 (1100-1 ¹ / ₂)	6000-3	2123 (2200-3)

ELEV 3877	TDZE 3852
3.2% UP 1644 X 75 1.7% UP 2889 X 75 0.3% DOWN 1584 X 75 0.3% DOWN 1584 X 75 271°	
REIL Rwy 17, and 35 1	
MIRL Rwy 5-23 and 17-35 1	
HIRL Rwy 9-27 1	