

APP CRS	Rwy Idg	11000
174°	TDZE	47
	Apt Elev	47

RNAV (RNP) Z RWY 17
ELLISON ONIZUKA KONA INTL AT KEAHOLE (KOA) (PHKO)


V For uncompensated Baro-VNAV systems, procedure NA below 6°C (43°F) or above 48°C (119°F). RF required. GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ mile.

MALSR

A5

MISSED APPROACH: Climb to 5000 on track 174° to WOPNA and right turn to NANLE, and on track 358° to ANDES and hold.

ATIS 127.4	HCF CENTER 118.45 278.3	KONA TOWER ★ 120.3 (CTAF) 254.3	GND CON 121.9	CLNC DEL 118.6
---------------	----------------------------	------------------------------------	------------------	-------------------

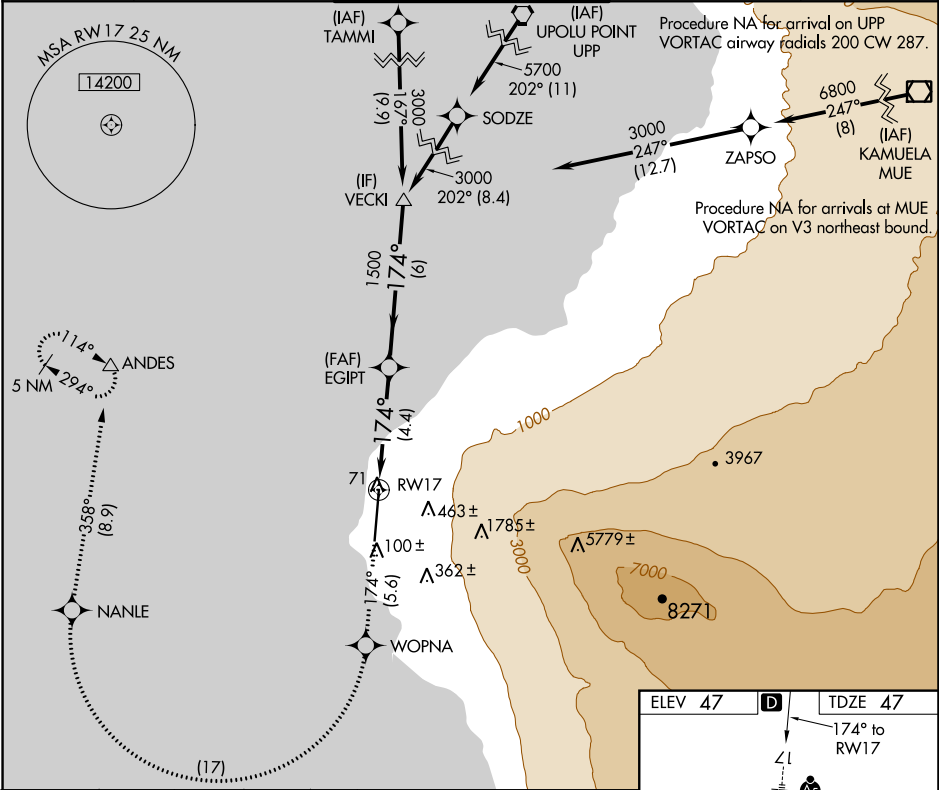

5000 ↑ tr 174° WOPNA

NANLE tr 358° ANDES

EGYPT 1500

3000

1500


174°

GP 3.00° TCH 55

4.4 NM 6 NM

CATEGORY	A	B	C	D
RNP 0.17 DA	297-¾ 250 (300-¾)			
RNP 0.30 DA	484-1 437 (500-1)			

AUTHORIZATION REQUIRED

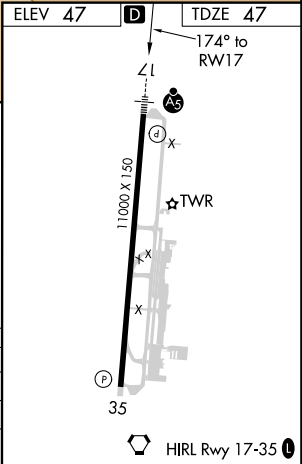

PAC, 25 JAN 2024 to 21 MAR 2024

PAC, 25 JAN 2024 to 21 MAR 2024