



LOC I-SNS	APP CRS	Rwy Idg	4825
108.5	315°	TDZE	82
		Apt Elev	84

ILS RWY 31
SALINAS MUNI (SNS)

DME required.	MALSR	MISSED APPROACH: Climb to 800 then climbing left turn to 4800 on SNS VORTAC R-275 to MARNA/ SNS 10.9 DME and hold, continue climb-in-hold to 4800.
When local altimeter setting not received, use Monterey altimeter setting and increase S-ILS 31 DA to 355 feet. For inop ALS when using Monterey altimeter setting, increase S-ILS 31 visibility to RVR 4500. DME from SNS VORTAC. DME use requires simultaneous reception of I-SNS and SNS DME.	AS	

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) 239.3	121.7	123.0

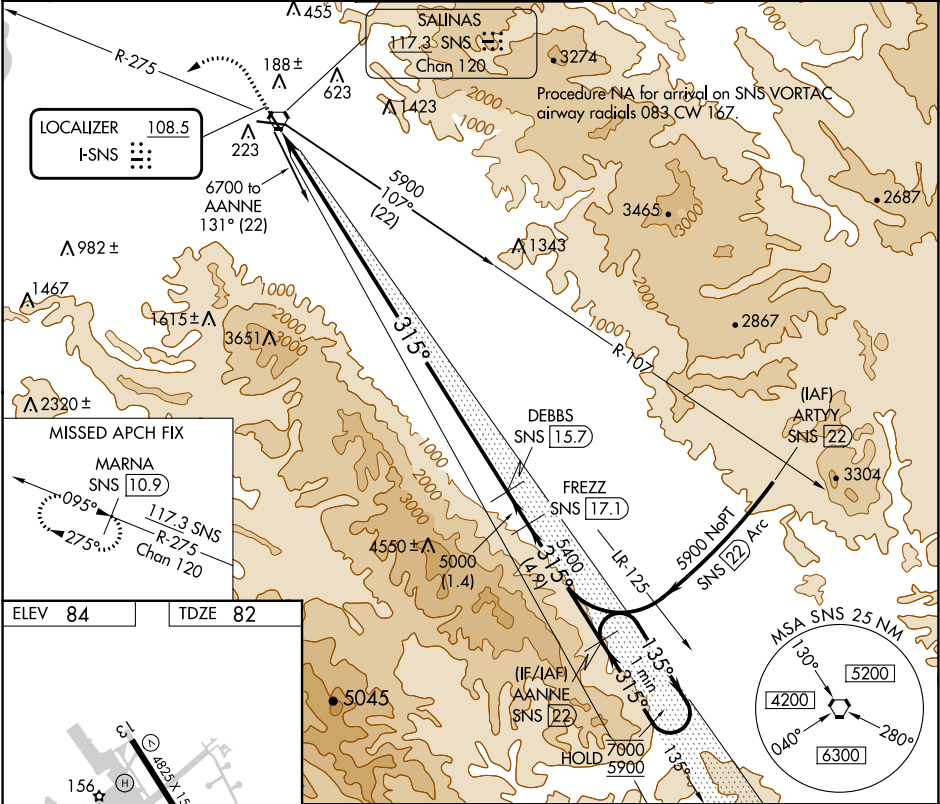

800	4800	MARNA SNS 10.9	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 59). AANNE SNS 22	One Minute Holding Pattern
SNS R-275	DEBBS SNS 15.7	FREZZ SNS 17.1		
	5000	5400	135°	7000
			315°	5900
	15.3 NM	1.4 NM	4.9 NM	GS 3.00° TCH 50
CATEGORY	A	B	C	D
S-ILS 31				302/24 220 (300-1/2)

SW-2, 22 FEB 2024 to 21 MAR 2024



SW-2, 22 FEB 2024 to 21 MAR 2024

WAAS CH 57944 W13A	APP CRS 135°	Rwy Idg 4825 TDZE 84 Apt Elev 84
--	------------------------	---

RNAV (GPS) RWY 13

SALINAS MUNI (SNS)

RNP APCH-GPS.			MISSED APPROACH: (Do not exceed 185K until MARNNA). Climb to 600 then climbing right turn to 4800 direct MARNNA and hold, continue climb-in-hold to 4800.	
Rwy 13 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Circling NA for Cats C and D northeast of Rwy 13 and north of Rwy 26.				
ATIS 124.85	NORCAL APP CON 133.0 251.15	SALINAS TOWER ★ 119.525 (CTAF) 239.3	GND CON 121.7	UNICOM 123.0

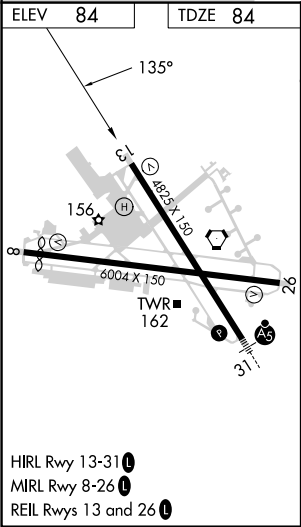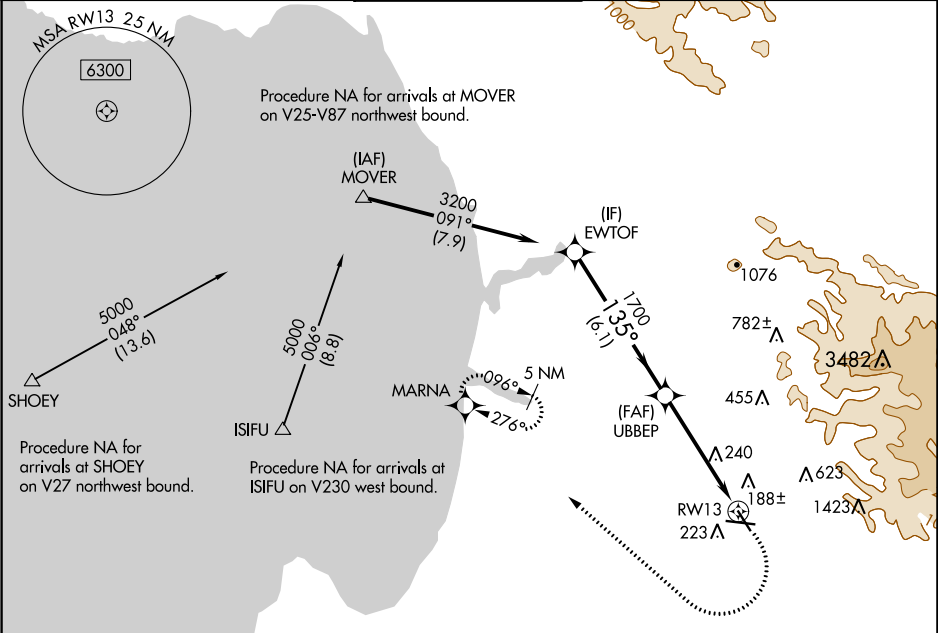

EWTOF		600		4800	MARNNA
3200		1700		1.4 NM to RW13	
GP 3.00°		1700		RW13	
TCH 50		6.1 NM		3.5 NM	1.4 NM
CATEGORY	A	B	C	D	
LPV DA	334-¾ 250 (300-¾)				
LNAV/VNAV DA	447-1 363 (400-1)				
LNAV MDA	580-1 496 (500-1)		580-1 ¾ 496 (500-1 ¾)		
CIRCLING	580-1 496 (500-1)		780-2 696 (700-2)		1620-3 1536 (1600-3)

APP CRS

Rwy Idg

5608

084°

TDZE

76

Apt Elev

84

RNAV (GPS) RWY 8

SALINAS MUNI (SNS)

RNP APCH-GPS.


▼

⚠

Circling Cat C/D NA northeast of Rwy 13 and north of Rwy 26.

MISSED APPROACH: (Do not exceed 185K until CODOG)
Climbing left turn to 2900 direct CODOG and hold, continue climb-in-hold to 2900.

ATIS 124.85	NORCAL APP CON 133.0 251.15	SALINAS TOWER ★ 119.525 (CTAF) 239.3	GND CON 121.7	UNICOM 123.0
----------------	--------------------------------	---	------------------	-----------------

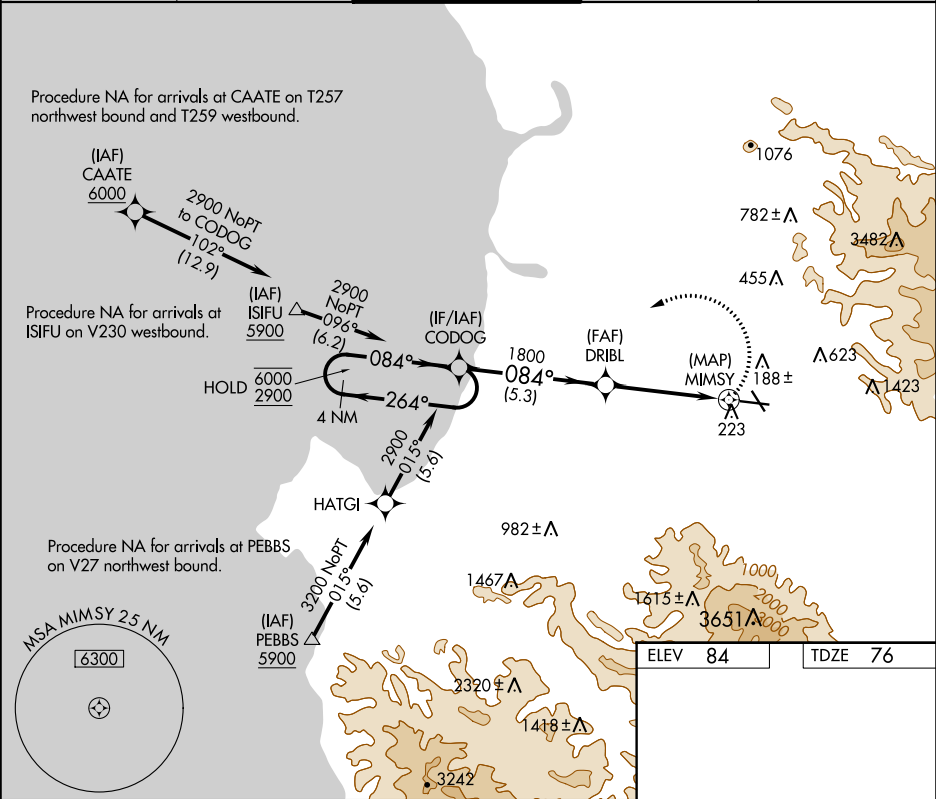



APP CRS	Rwy Idg	4825
315°	TDZE	82
	Apt Elev	84

RNAV (GPS) Y RWY 31

SALINAS MUNI (SNS)

RNP APCH-GPS. ⚠ Circling NA for Cats C and D northeast of Rwy 13 and north of Rwy 26. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.	MALSR ⚠	MISSED APPROACH: Climb to 600 then climbing left turn to 4800 direct MARNA and hold, continue climb-in-hold to 4800.
--	------------	--

ATIS 124.85	NORCAL APP CON 133.0 251.15	SALINAS TOWER ★ 119.525 (CTAF) 0 239.3	GND CON 121.7	UNICOM 123.0
----------------	--------------------------------	---	------------------	-----------------

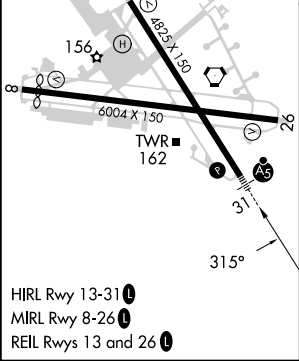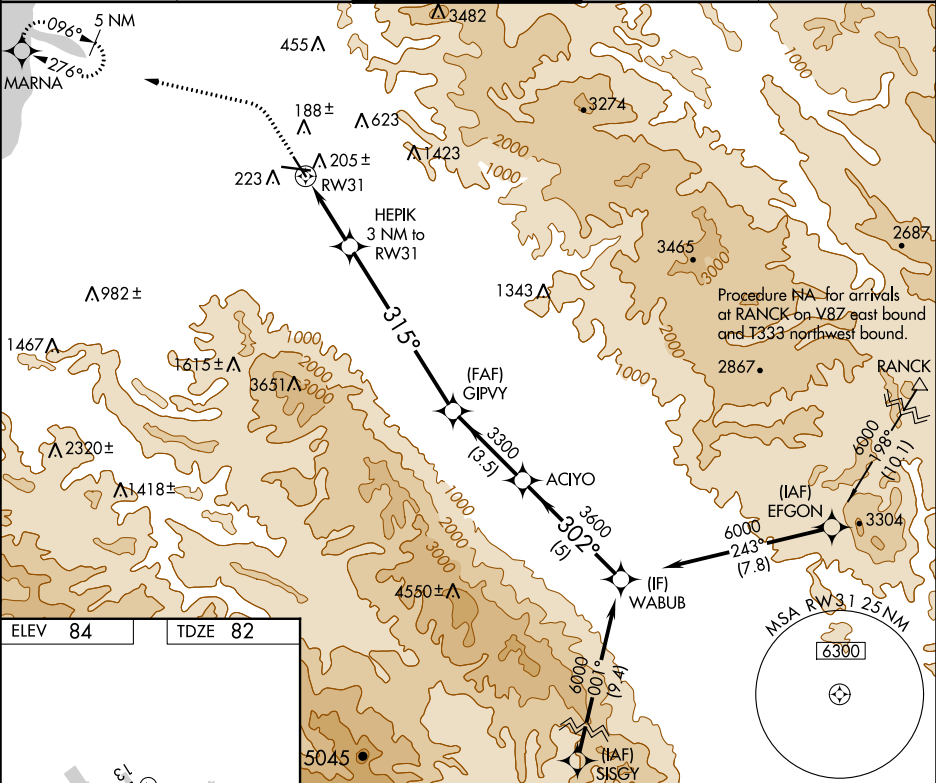

600	4800	MARNA	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 59).		WABUB
CATEGORY	A		B		D
LNAV MDA	440/24 358 (400-½)		440/30 358 (400-¾)		
CIRCLING	540-1 456 (500-1)		780-2 696 (700-2)		1620-3 1536 (1600-3)

SALINAS, CALIFORNIA

AL-363 (FAA)




22307

WAAS CH 69513 W31A	APP CRS 315°	Rwy Idg 4825 TDZE 82 Apt Elev 84
--	------------------------	---

RNAV (GPS) Z RWY 31
SALINAS MUNI (SNS)

RNP APCH-GPS.	MALSR	MISSED APPROACH: Climb to 600 then climbing left turn to 4800 direct MARNA and hold, continue climb-in-hold to 4800.
 Baro-VNAV NA.		

ATIS 124.85	NORCAL APP CON 133.0 251.15	SALINAS TOWER ★ 119.525 (CTAF) 0 239.3	GND CON 121.7	UNICOM 123.0
-----------------------	---------------------------------------	--	-------------------------	------------------------

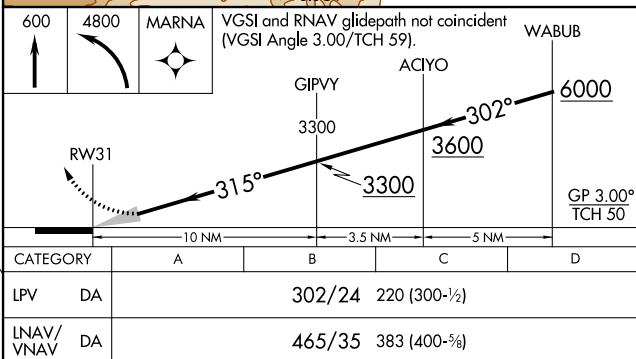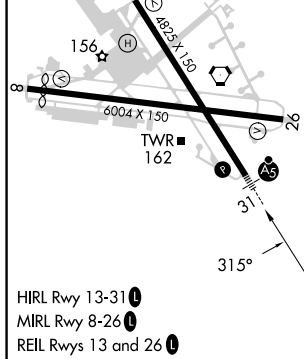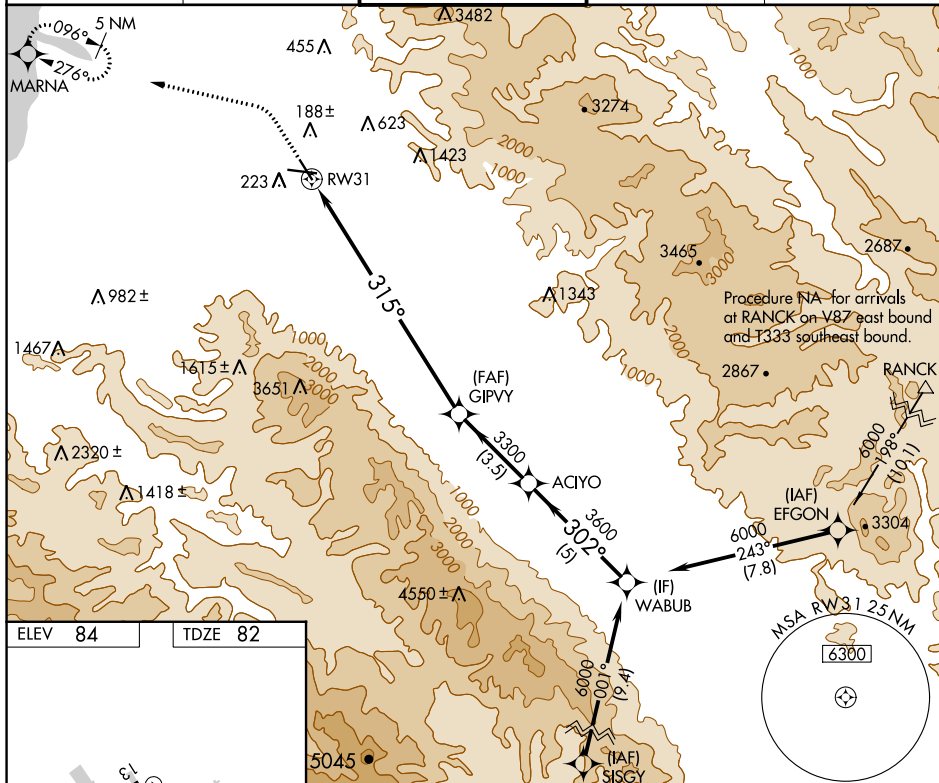

SALINAS, CALIFORNIA
Amdt 1 19MAY22

36°40'N-121°36'W

SALINAS MUNI (SNS)
RNAV (GPS) Z RWY 31

SW-2, 22 FEB 2024 to 21 MAR 2024

VORTAC SNS	APP CRS	Rwy Idg	4825
117.3	122°	TDZE	84
Chan 120		Apt Elev	84

VOR RWY 13

SALINAS MUNI (SNS)

DME required.	MISSED APPROACH: Climbing right turn to 4800 on SNS VORTAC R-275 to MARN/SNS 10.9 DME and hold, continue climb-in-hold to 4800.
▼ Rwy 13 helicopter visibility reduction below 1 SM NA. Circling NA for Cat C northeast of Rwy 13 and north of Rwy 26 and NA for Cat D northeast of Rwy 13-31.	

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) 239.3	121.7	123.0

