

WAAS CH 45710 W28A	APP CRS 281°	Rwy Idg 3399 TDZE 423 Apt Elev 427
--	------------------------	---

RNAV (GPS) RWY 28R
MONTGOMERY-GIBBS EXEC (MYF)

RNP APCH.


MALSR




T Rwy 28R helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct JOPDO and on track 327° to CARIF and hold.

ATIS 126.9	SOCAL APP CON 124.35 279.625	MONTGOMERY TOWER ★ 119.2 (CTAF) 0 269.4 (Rwys 5, 10L/R, 23, 28L) 125.7 269.4 (Rwy 28R)	GND CON 118.225	CLNC DEL 123.725	UNICOM 123.075
----------------------	--	---	---------------------------	----------------------------	--------------------------

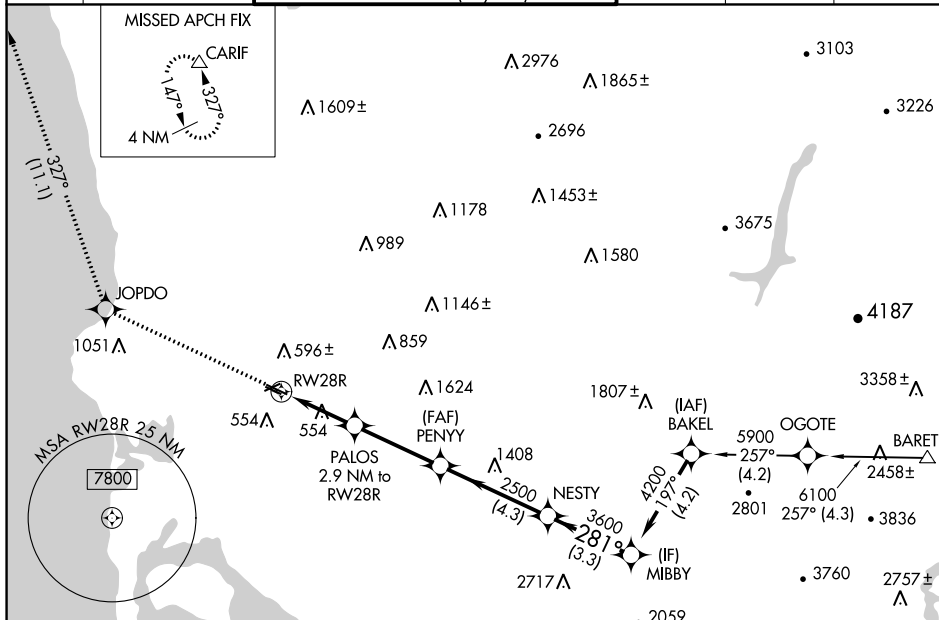

ELEV 427		TDZE 423
----------	--	----------

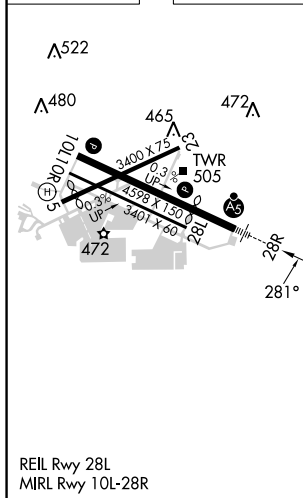

3000 ↑	JOPDO ✱	tr 327°	CARIF △					
* LNAV only				PALOS 2.9 NM to RW28R PENYY 2500 NESTY MIBBY 4200 GP 3.00° TCH 41				
RW28R				1.2 NM → 1.7 NM → 3.4 NM → 4.3 NM → 3.3 NM				
CATEGORY		A		B		C		D
LPV	DA	673- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)			NA		
LNAV/ VNAV	DA	750- $\frac{3}{4}$	327 (400- $\frac{3}{4}$)			NA		
LNAV	MDA	840- $\frac{3}{4}$	417 (500- $\frac{3}{4}$)			NA		
CIRCLING		920-1	493 (500-1)			NA		

RNAV (GPS) RWY 28R