

WAAS CH 61106 W20A	APP CRS 197°	Rwy Idg 6000 TDZE 442 Apt Elev 444
--	------------------------	---

RNAV (GPS) RWY 20
BREMERTON NTL (PWT)

RNP APCH.

V Circling NA for Cats C and D west of Rwy 2-20. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Seattle-Tacoma Intl altimeter setting. When local altimeter setting not received, use Seattle-Tacoma Intl altimeter setting and increase all DA 45 feet and all MDA 60 feet; increase LNAV Cat A and increase Circling Cats C/D visibility ½ SM. Inop table does not apply to LNAV/VNAV all Cats.

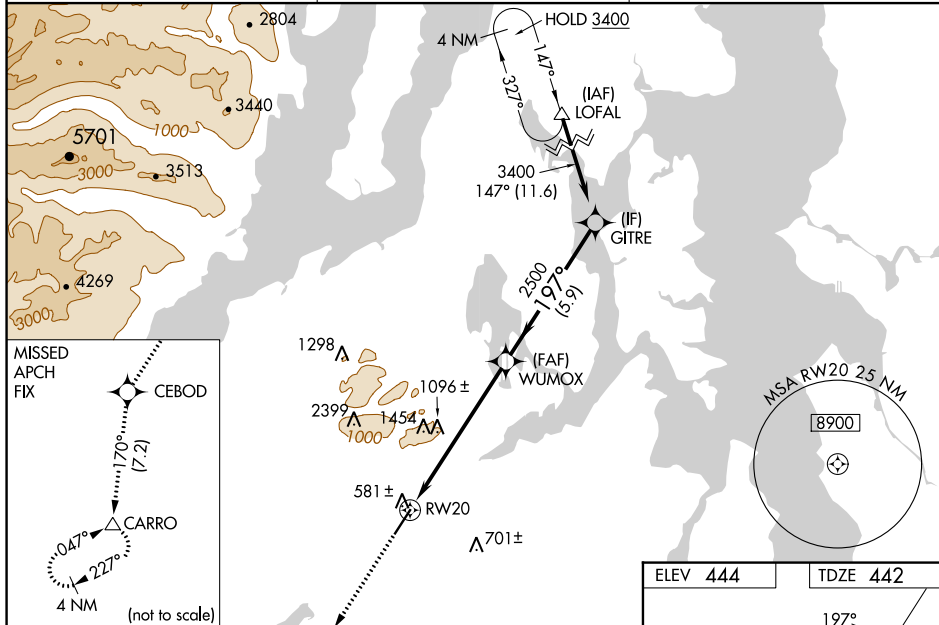
MALSR



MISSED APPROACH:
Climb to 4000 direct CEBOD
and on track 170° to
CARRO and hold, continue
climb-in-hold to 4000.

AWOS-3PT
121.2

SEATTLE APP CON
120.1 254.4 269.125

UNICOM
123.05 (CTAF) **L**

4000 ↑	CEBOD ✱	tr 170°	CARRO △				
*LNAV only				*2.5 NM to RW20			
				GP 3.00° TCH 49			
CATEGORY	A		B		C		D
LPV DA	642-½		200 (200-½)				
LNAV/ VNAV	1396-4		954 (1000-4)				
LNAV MDA	1300-½ 858 (900-½)	1300-¾ 858 (900-¾)	1300-2		858 (900-2)		
C CIRCLING	1300-1¼	856 (900-1¼)	1300-2½ 856 (900-2½)		1300-2¾ 856 (900-2¾)		

