


WAAS CH 65634 W06B	APP CRS 062°	Rwy Idg TDZE Apt Elev	6013 6 8
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) X RWY 6

TETERBORO (TEB)

RNP APCH - GPS. RADAR required.	MALSR	MISSED APPROACH: Climb to 1000, then climbing left turn to 2000 direct TEBLE, cross TEBLE at or below 2000, then climb to 3000 on track 272° to UBUCK and hold.
▼ Circling NA for Cats B, C and D northwest of Rwy 6 and 19. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1½ SM, and LNAV/VNAV all Cats visibility to 1⅞ SM.		

D-ATIS	NEW YORK APP CON	TETERBORO TOWER	GND CON	CLNC DEL	CPDLC
114.2 132.85	127.6 379.9	119.5	121.9	128.05	

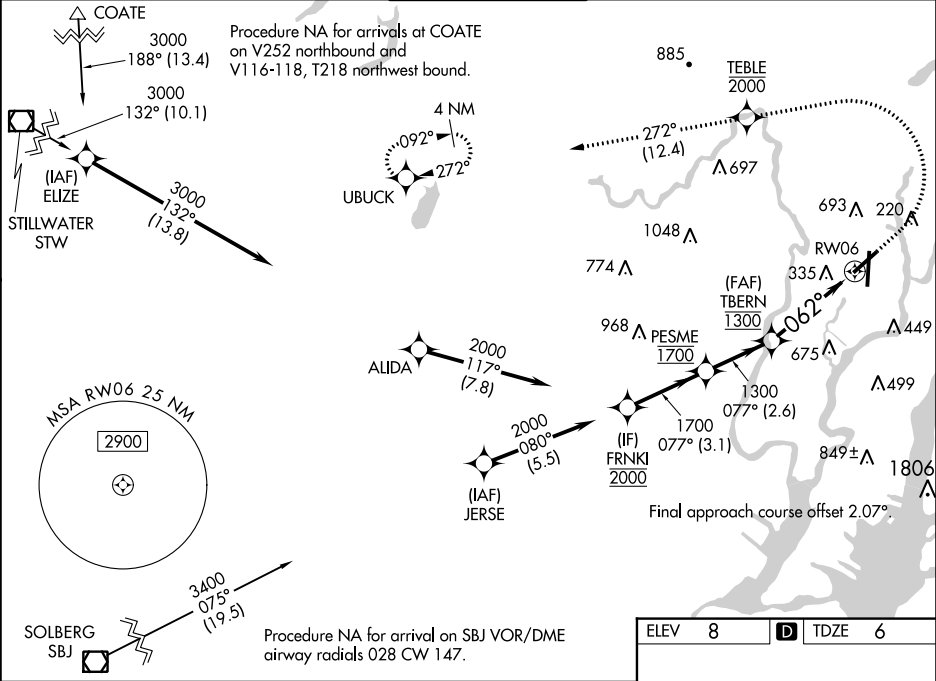

FRNKI	1000	2000	TEBLE	3000	UBUCK
2000	↑	↻	✱	↑	tr 272°
			2000		
GP 3.00° TCH 55			1.9 NM to RW06		
	3.1 NM	2.6 NM	2 NM	1.9 NM	
CATEGORY	A	B	C	D	
LPV DA		459/45	453 (500-⅞)		
LNAV/ VNAV DA		672-1½	666 (700-1½)		
LNAV MDA	660/24	654 (700-½)	660-1⅜	654 (700-1⅜)	
CIRCLING	760-1	752 (800-1)	820-2½ 812 (900-2½)	1040-3 1032 (1100-3)	

