

LOC I-VLD	APP CRS	Rwy Idg
110.9	356°	8002
	TDZE	200
	Appt Elev	203


ILS or LOC RWY 36
VALDOSTA RGNL (VLD)

⚠ Rwy 36 helicopter visibility reduction below 3/4 SM NA. DME from OTK VOR/DME. DME use requires simultaneous reception of I-VLD and OTK DME. For inop ALS, increase S-ILS 36 all Cats visibility to 1/8 SM, increase S-LOC 36 Cats A and B visibility to 1 SM and Cat E visibility to 1 1/4 SM.

MALSR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 on heading 231° and GEF R-051 to GEF VORTAC and hold.

ASOS 126.225	VALDOSTA APP CON ★ 126.6 285.6	VALDOSTA TOWER ★ 128.35 (CTAF)	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

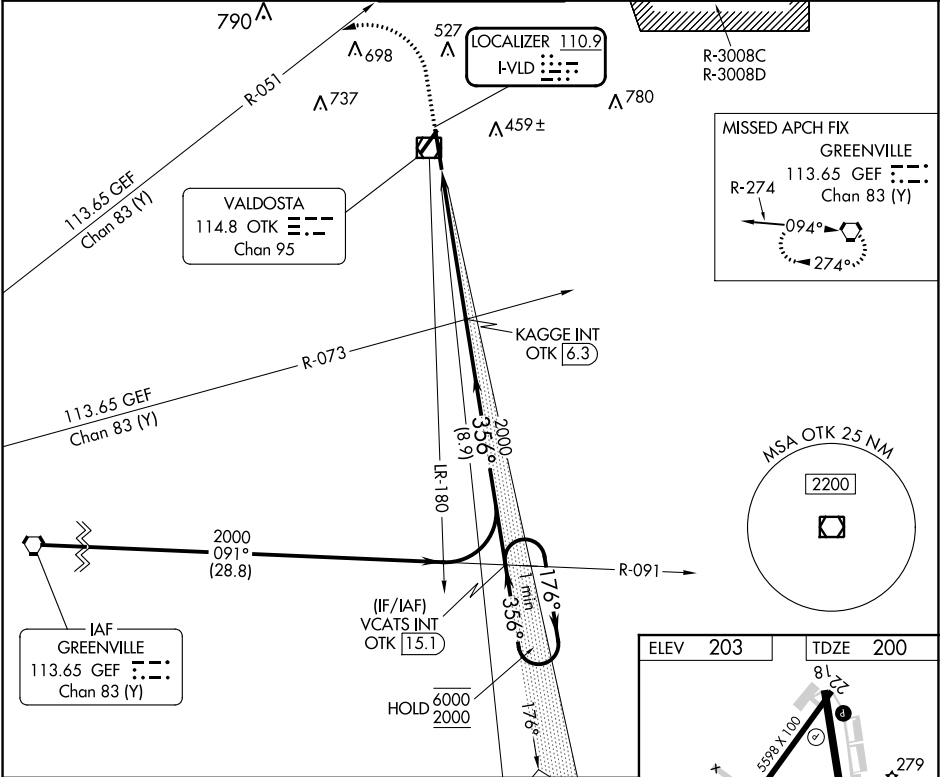

1200 ↑
2000 hdg 231°

GEF R-051

OTK [0.8]

KAGGE INT OTK [6.3]


VCATS INT OTK [15.1]

One Minute Holding Pattern

GS 3.00° TCH 53

1.2 NM, 4.3 NM, 8.9 NM

CATEGORY	A	B	C	D	E
S-ILS 36	489-3/4 289 (300-3/4)				
S-LOC 36	640-3/4 440 (500-3/4)				
CIRCLING	640-1 437 (500-1)	700-1 497 (500-1)	900-2 697 (700-1)	1020-2 3/4 817 (900-2 3/4)	1040-3 837 (900-3)

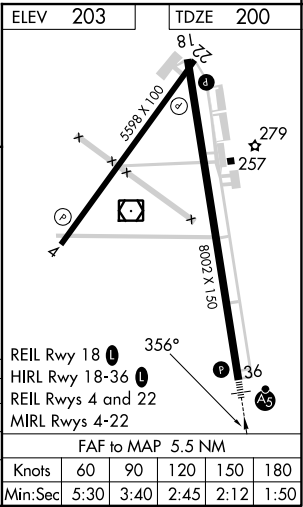

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024